

JOINT INTEGRATION TEST FACILITY (JITF)
DoDIIS INTEGRATION
REQUIREMENTS and EVALUATION PROCEDURES VERSION 3.0
for
ENTERPRISE (WEB-BASED) APPLICATIONS

January 15, 2001

Produced By:
Department of the Air Force
Air Force Research Lab
Rome Research Site
32 Brooks Road
Rome, New York 13441-4114

UNCLASSIFIED

TABLE OF CONTENTS

1	INTRODUCTION.....	1
1.1	JITF INFORMATION.....	2
1.2	CERTIFICATION CRITERIA FOR INTEGRATION.....	2
1.3	JITF TEST REPORTS.....	3
1.4	IMPACT CODE LEVELS FOR JITF INTEGRATION TESTING	4
2	REFERENCES.....	6
3	INTEGRATION REQUIREMENTS	7
3.1	DOCUMENTATION	7
3.2	INSTALLATION AND CONFIGURATION.....	26
3.3	ENVIRONMENT	58
3.4	OPERATION.....	67
3.5	USER INTERFACE	93
3.6	INTEGRATION SECURITY.....	99
4	ACRONYMS	116
	Figure 1 - DoDIIS Certification Process.....	3

UNCLASSIFIED

1 INTRODUCTION

This document specifies the requirements that applications and information technology components implemented as enterprise, or web-based, applications must meet in order to successfully integrate into the operating environments of sites within the Department of Defense Intelligence Information System (DoDIIS) community. This environment emphasizes the objectives of integration, interoperability, shareable resources, and modularity of applications. The DoDIIS Certification Process has been defined to ensure that applications, regardless of architecture and implementation, will operate in this environment.

This document focuses on the integration requirements that are applicable to web-based and enterprise applications. In keeping with the current test process, Integration Requirements will be reviewed for applicability to the application that is being tested. However, not all requirements will necessarily be applied to each application. This is due to the number of implementations for enterprise applications. Implementations range from applications that rely solely on the services and capabilities of web browsers to applications that load software on client platforms (i.e., "thick" clients"). Therefore, applications will be evaluated only against Integration Requirements that are applicable.

The level of effort for integration testing of an application depends upon the implementation of the application. For example, there is less emphasis on evaluation of the installation of a single, centralized server than on installation of servers that are either deployed to sites or are installed at sites by site administrators. There is less emphasis on client installations and operation if the client access is entirely via a web browser rather than via a thick client. The effect of an application upon integration security will be dependent upon its architecture and implementation. For reasons such as these, pre-test planning includes description of the application architecture, assessment of applicable integration requirements and estimation of the level of effort to conduct testing. The level of effort can range from one or two days for a browser-based application with a centralized server to one or two weeks for an application implementing a thick client architecture and multiple operating system versions.

The integration requirements contained in this document are organized by category:

- Documentation - These requirements evaluate the content and structure of application documents that the system administrator/installer will rely on to plan the application's resource requirements and to determine the effects of the software on the operational and security architectures of the site.
- Configuration and Installation - These requirements evaluate the application installation process and the steps required to configure the application for use.
- Environment - These requirements evaluate the operating environment established or required by the application when it begins execution and the potential effects of that environment on other applications.
- Operation - These criteria examine aspects of the execution of the application that could affect the execution, configuration, or security of other applications, either on the same hardware platform or on other platforms at the site. Included in this

UNCLASSIFIED

category is how administration of the application integrates into the overall system administration strategy of a site.

- User Interface - These criteria are concerned with the integration of the application with the windowing system of the workstation.
- Integration Security - These requirements identify areas of the design and operation of the application that may affect the site security architecture and the level of effort on the part of system administrators and security officers to maintain the site security architecture. These requirements address areas of system security architecture that are not identified in the application security documentation.

This document is organized in the following sections:

- Section 1 provides an introduction to integration requirements and additional information.
- Section 2 provides a list of references.
- Section 3 contains the Integration Requirements, including explanations and test methods. Also identified are those requirements, which are or are not applicable to applications using a central server accessed by a browser only.
- Section 4 contains a list of acronyms.

1.1 JITF INFORMATION

Comments and recommendations for changes to this document can be submitted by any reader and should be provided in writing. Please identify the page and paragraph associated with each comment. All written comments will be reviewed and a disposition for each comment will be provided to the originator of the comment. Comments can be submitted via the following means:

U.S. Mail: CUBIC CM
RL/IFEB
32 Brooks Rd
Rome, NY 13441-4114

Electronic Mail: cubic_cm@rl.af.mil

Additional copies of this document can be downloaded at the following addresses:

- Internet World Wide Web: <http://www.if.afrl.af.mil/programs/jitf>
- Intelink: <http://web1.rome.ic.gov/vtf.cgi>

1.2 CERTIFICATION CRITERIA FOR INTEGRATION

Figure 1 illustrates the DoDIIS Certification Process that is defined by the *DoDIIS Instructions 2000* and further described in information provided by the DoDIIS Executive Agent (DEXA) for Test and Evaluation (497IOG).

UNCLASSIFIED

In accordance with the *DoDIIS Instructions 2000*, the JITF is tasked to make "go/no go" recommendations on applications to the DoDIIS Management Board (DMB) as a result of integration testing.

A "no go" recommendation indicates that there are findings for the application under evaluation that seriously affect the capability of the application to install and/or operate in a site environment without affecting other applications or site operations. The DMB is the decision authority for the certification process and uses the JITF recommendation in making a final determination for the application to proceed to the next phase.

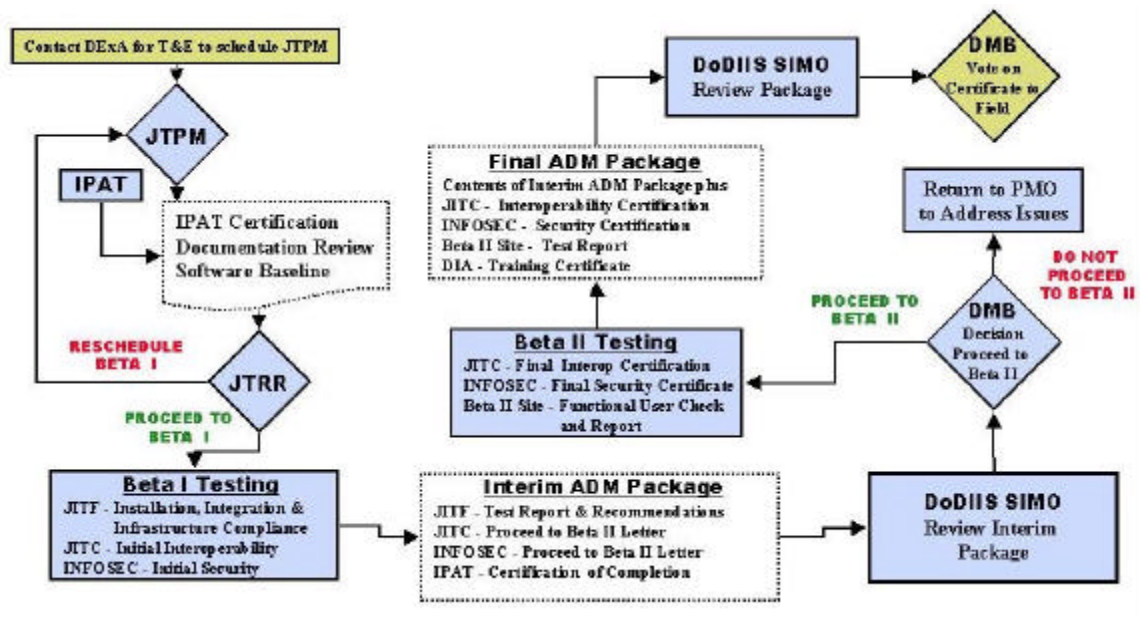


Figure 1 - DoDIIS Certification Process

1.3 JITF TEST REPORTS

Test reports are available on the Virtual Test Folder (VTF) that is maintained by the JITF. The VTF is located on Intelink at <http://web1.rome.ic.gov/vtf.cgi>. The JITF test report details the extent of compliance with the Integration Requirements and provides an assessment of the consequences of the resulting level of integration quality of the application.

The findings and recommendation for each application are published in the JITF Test Report. The JITF Test Report for the application under test will include:

- Evaluation of compliance with the Integration Requirements
- Assessment of effects of non-compliance with Integration Requirements
- Recommendations on integration security issues
- Identification and assessment of other issues that affect the usability of the system baseline in operational environments

UNCLASSIFIED

- "Go/no go" recommendation for continued movement of the application through the certification process

1.4 IMPACT CODE LEVELS FOR JITF INTEGRATION TESTING

The JITF evaluates the extent to which the application meets each requirement. For each requirement not met by the mission application, the JITF documents a test finding and assesses an Impact Code level for that finding. The impact code is a measure of the significance of the finding with respect to integrating the application into site architecture.

Not all of the integration requirements have equal weight. That is, the failure to meet some requirements has more significance than the failure to meet other requirements. In addition, the design of the application will also influence the significance of requirements that are not met.

A successful evaluation means that the mission application has passed integration testing, and the JITF will recommend that the application proceed to the next step in the Certification Process.

An unsuccessful evaluation means that the application has failed integration testing, and the JITF will recommend that the application not proceed to the next step in the Certification Process.

The following codes are used by JITF test teams to indicate the severity or significance of each integration finding.

Impact Code 1

A finding that, without resolution, either

- a) prevents either the application under evaluation or another application or component of the infrastructure from operating properly;
- b) creates a security vulnerability in the application or site architecture that can be exploited by a general user without taking advantage of other vulnerabilities or capabilities; or
- c) seriously increases the level of effort of site personnel to manage and/or use the application under evaluation or other applications.

An Impact Code 1 finding is assigned if the application baseline must be changed in order to continue testing, if the resolution requires an excessive level of effort, or if the resolution introduces additional problems in the installation or operation of the application.

The level of effort is a key determinant for Impact Code 1 findings. The time or expertise that is required to install, manage, or use the application cannot exceed what is reasonably expected for an application. For example, if the installation guide says that the application can be installed in a single day, but the installation takes more than 20 working hours, then an Impact Code 1 can be appropriately applied.

Impact Code 2

A finding that, without resolution,

UNCLASSIFIED

- a) has a significant effect on the operation of either the mission application or on another application or component of the infrastructure; or
- b) creates a security vulnerability in the application or site architecture that could be exploited by a general user only if the user is able to take advantage of other vulnerabilities or capabilities not typically available to him or her.

The finding can be temporarily resolved by a change in procedure or configuration. The successful resolution requires technical expertise that is not expected of general users, or the resolution requires a significant level of effort by site administrators. The resolution does not cause significant delay in integration testing; instead, it can be proposed and evaluated during integration testing at the JITF.

Impact Code 2 findings may cause integration test failures depending upon the level of effort required to implement the resolution (and the confidence in it). An Impact Code 2 problem may be elevated to an Impact Code 1 if proposed resolutions either do not work successfully or produce additional Impact Code 2 and 3 findings.

Impact Code 3

A finding that, without resolution, has a significant effect on the operation of either the application or on another application or component of the infrastructure. The finding can be temporarily resolved by a change in procedure or configuration. The successful resolution does not require technical expertise that is not expected of general users, or the resolution does not require a significant level of effort by site administrators. The resolution does not cause significant delay in integration testing; instead, it can be proposed and evaluated during integration testing at the JITF.

Impact Code 3 findings do not cause integration test failure, but the accumulation of Impact Code 3 findings may affect the JITF's "go/no go" recommendation.

Impact Code 4

A finding that does not significantly affect the operation of the application or another application or component of the infrastructure. The finding can be resolved by a workaround that can be implemented as a change in procedure or configuration during integration testing without a significant level of effort, or the finding can be left as is. Even though the finding has some affect on the configuration or operation of the mission application or of other components of the site architecture, the general user will be able to perform mission functions, and the administrator will be able to manage the mission application. Findings in this category are of lesser importance, but the accumulation of Impact Code 4 findings may affect the JITF's "go/no go" recommendation.

UNCLASSIFIED

2 REFERENCES

AIA 497th Information Operations Group /INDS, *Test and Evaluation Policy for Department of Defense Intelligence Information System (DoDIIS) Intelligence Mission Applications (IMA)*, April 1999

DoDIIS Management Board, *DoDIIS Profile of the DoD Joint Technical Architecture (JTA) and Defense Information Infrastructure Common Operating Environment (DII COE) Version 3.1*, September 2000

DoDIIS Management Board, *DoDIIS Instructions 2000*, February 2000.

Protecting Sensitive Compartmented Information Within Information Systems (DCID 6/3)-Manual, 1999

Joint DoDIIS/Cryptologic SCI Information Systems Security Standards, March 1998

Microsoft Corporation, *Designed for Microsoft® Windows NT® 4.0 and Windows® 98 Logo, Handbook for Software Applications*, Version 3.0d, February 4, 1999

Common User Baseline for the Intelligence Community (CUBIC) Configuration Management Plan, November 5, 1999

UNCLASSIFIED

3 INTEGRATION REQUIREMENTS

Requirements for integration are listed and described in this section. For each requirement an explanation is provided and the evaluation method is listed. Where possible, evaluation of requirements is automated through the use of software testing tools developed or acquired by the JITF. The fourth column identifies the typical impact code ranges associated with the requirement.

Each requirement is reviewed for applicability for the version of software under evaluation. Windows NT requirements are evaluated using NT Logo Testing procedures, which are enhanced where applicable. Additional Solaris-specific analysis is provided via the Sun Microsystems' application certification binary compatibility tool.

For applications using a centralized server (one server location) and browser access (no client installation with the exception of "plugins") a number of integration requirements are not applicable. These are identified by a "Not Applicable" (i.e. the requirement will not be evaluated) in the column titled Central Server with Browser. Requirements that do apply to applications using a centralized server with browser access are identified by an "Applicable".

3.1 DOCUMENTATION

DOC-1 Application documents shall contain page numbers for all sections and appendices.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Page numbering improves the utility of each application document. This can be especially significant when the reader must identify to a third party (such as a help desk) an entry in a document that either has errors or is unclear. Page numbers within a single document shall not be repeated.	Application documents will be inspected for inclusion of page numbers.	Applicable	2 - 4

UNCLASSIFIED

DOC-2 Application documents shall contain numbered sections.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Construction of a document in numbered sections improves the utility of the document and aids the reader in identifying areas with errors or requiring clarification.	Application documents will be inspected for inclusion of numbered sections.	Applicable	3 - 4

DOC-3 Figures and tables in application documents shall have titles and reference numbers.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Assigning titles and reference numbers to all figures and tables improves the utility and readability of the document.	Application documents will be inspected for inclusion of titles and reference numbers on all figures and tables.	Applicable	3 - 4

DOC-4 Soft copy documents shall match hard copy versions in content, structure, and sectioning.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In order to avoid confusion that may occur when matching a soft copy version of a document to a hard copy version (e.g., when discussing a problem with the application help desk), the two versions should match exactly. At a minimum, the content, structure, and sectioning of the document should be	<p>The soft copy version will be compared to the hard copy version.</p> <p>This requirement is met if the content, structure, and sectioning of the soft copy document match the sectioning of the hard copy document.</p>	Applicable	3 - 4

UNCLASSIFIED

consistent for both versions.	This requirement is Not Applicable if no soft copy documentation is provided.		
-------------------------------	---	--	--

DOC-5 Application configuration and installation information shall be consolidated into a single configuration and installation document.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application administrator/installer must be able to find all necessary information for the installation of the application in a single, logically ordered, document. This approach lowers the probability of errors during the configuration and installation process. If configuration and installation instructions must be spread beyond a single document, then these documents must specifically reference the parts needed in each other, preferably by section and/or step. If referencing another document, it must be by specific identifier (such as title and date, document reference number, etc).	<p>The objective will be evaluated by inspection of the configuration and installation guide.</p> <p>This requirement is not met if the configuration and installation information is spread across several documents and the references to additional documents are not explicitly stated.</p>	Applicable	2 - 3

DOC-6 The application documentation shall include installation verification information.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Configuration and installation of the application can directly affect the operating and security	Acceptable verification documentation includes: the System Test Plan and Procedures, System	Applicable	2 -3

UNCLASSIFIED

architectures of the application and of the site. The JITF will confirm that the application was successfully installed and configured according to the application baseline. Verification documentation assists the JITF, as it would a user site, with this confirmation.	Security Test Plan and Procedures Site Acceptance Test (SAT) Plan and Procedures, or similar documents. The requirement is met if verification documentation is provided. The evaluation will include an estimation of the adequacy of the verification documentation.		
---	---	--	--

DOC-7 The application configuration and installation guide shall specify if the application requires a dedicated platform for the application server or if the application server can be installed on a platform shared with other application servers.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>One goal of the common infrastructure is to give the sites flexibility in selecting how each application will be installed and used. An application that, by design, permits sharing of a platform with other application servers allows sites to select platforms based upon application performance and resource usage. An application that, by design, requires a dedicated platform may hinder integration of the application into a site simply because the site is forced to acquire and install hardware and extend its application administration strategy to cover the newly installed application.</p> <p>There are risks associated with both approaches. The extent of the risk with regard to site integration depends upon the quality of the application</p>	<p>Application configuration and installation guide will be inspected to verify that the need for a dedicated server platform or the ability to share a server platform is specified.</p> <p>The absence of this information results in an assessment of Does Not Meet.</p>	Not Applicable	2 - 3

UNCLASSIFIED

configuration and installation guide and on availability of resources and personnel to install and manage the application.			
--	--	--	--

DOC-8 The application installation and configuration guide shall contain step by step instructions to perform application installation and configuration.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The goal of application configuration and installation guide is to permit the reader (e.g., the application administrator) to install and configure the application without error. The configuration and installation guide should not increase the probability of error due to lack of clarity or information.	Installation and configuration guide will be inspected for step by step instructions. Each step should be concise and constitute a single action. The step should be explained sufficiently to avoid unnecessary guesswork or presumptive decisions by the installer. The requirement is not met if the installation is not written in step-by-step format, if one or more steps are missing, or if one or more steps are sufficiently unclear that the installer cannot decide how to proceed.	Applicable	1 - 4

DOC-9 The application configuration and installation guide shall include instructions to add the application to the infrastructure application selection mechanism.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The installation process must include the steps to	The application configuration and installation	Not Applicable	2 - 3

UNCLASSIFIED

add the application under evaluation to the application selection mechanism (e.g., background window menu application folder, etc.). The installation procedure provided by the application developer must include the application name, executable location, and the command lines that are required to set needed environment variables and launch the application.	<p>guide will be examined to verify that instructions for adding the application to the infrastructure application selection mechanism are included. Once the installation has been completed, the application selection mechanism (e.g., background window menu) will be invoked on the test workstation. Verify that an entry for the application appears in the menu as documented in the installation procedures. Select the application from the background menu and verify the execution of the application.</p> <p>Automatic addition of the application to the infrastructure application selection mechanism is acceptable.</p>		
---	--	--	--

DOC-10 Application documentation shall specify points of contact (phone, electronic mail, etc) for application support.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Administrators and users must be able to identify and communicate with personnel who can assist with questions and problems. This information must be contained in the appropriate application documentation. Telephone and electronic mail are acceptable forms of communication.	Application documents will be inspected to verify that points of contact are provided. The information must include the office or organization name, telephone number (s), and electronic mail address, if one is available.	Applicable	2 - 4

UNCLASSIFIED

DOC-11 The application configuration and installation guide shall specify the minimum amount of disk space needed to install and execute the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
All space requirements and specific file systems, if any, needed to install and run the application must be specified. This includes disk space for executables, as well as storage for application and user data.	Configuration and installation guide will be inspected to verify that minimum disk space is specified.	Not Applicable	3 - 4

DOC-12 Not applicable for Version 3.0 test procedures. Incorporated into DOC-11.

DOC-13 The application configuration and installation guide shall specify the recommended size of random access memory (RAM) required to execute the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
This is typically a performance issue; applications should make recommendations on RAM for site consideration. This specification should be made for both user workstations and application server platforms.	Configuration and installation guide will be inspected to verify that recommended RAM size is specified.	Not Applicable	2 - 3

UNCLASSIFIED

DOC-14 The application configuration and installation guide shall specify the operating system versions and operating system packages/subsets that must be installed to support the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application should not require that each site install the full operating system load as routine practice. Therefore, the application should identify the software dependencies with regard to specific operating system version and also the operating system modules (i.e., subset packages or resource kits) that must be installed in order for the application to operate properly.	Configuration and installation guide will be inspected to verify that operating system versions and packages/subsets/resource kits are specified. The absence of this information results in an assessment of Does Not Meet.	Not Applicable	2 - 3

DOC-15 The application configuration and installation guide shall specify the operating system patch levels that must be installed to support the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Application developers make independent decisions regarding patch level compatibility. Therefore, the Configuration and installation guide must state known dependencies upon patch levels. This may not be a significant issue for sites that stay current with all operating system packages. However, it is necessary information for sites that may not be current and is an incentive for site administrators to update patch levels on site workstations.	Configuration and installation guide will be inspected to verify that patch levels for each supported operating system are specified. The requirement is met if the specific patch list is provided; it is not sufficient to simply require "the latest patches". For the NT platform: include required service	Not Applicable	1 - 2

UNCLASSIFIED

The documentation shall include information as to what OS patches may be required.	packs/hotfixes.		
--	-----------------	--	--

DOC-16 The application configuration and installation guide shall specify any modifications made to the operating system configuration that are required to support the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Modifications to the Unix kernel or to the NT operating system configuration are not necessary for most applications. Modification would be required if the application requires an additional hardware device, additional software resources such as interprocess communication, or additional drivers for I/O devices. In such situations, the necessary modifications must be clearly stated in the configuration and installation documentation.	Configuration and installation guide will be inspected to verify that modifications for each supported operating system are specified. This requirement is Not Applicable if no modifications are required.	Not Applicable	2 - 3

DOC-17 The application configuration and installation guide shall specify additional hardware and associated drivers that are required to support the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
If the application requires additional hardware and installation of software drivers to control the hardware, the configuration and installation guide will clearly specify the steps needed to successfully	Configuration and installation guide will be inspected to verify that instructions to install additional hardware and associated software drivers in each supported operating system are	Not Applicable	1 - 2

UNCLASSIFIED

install and configure both.	specified. If no additional hardware and installation of software drivers to control the hardware are utilized, this requirement is Not Applicable.		
-----------------------------	--	--	--

DOC-18 The application configuration and installation guide shall specify additions/modifications to system configuration files that are required to support the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Many applications may use system configuration files. As a result, no application should make undocumented changes to configuration files.	<p>The application configuration and installation guide should clearly specify the modifications that will be made during installation. The installation process must not overwrite system configuration files (e.g., /etc/hosts, /etc/services, and /etc/syslog.conf), since information that was added by other applications may be lost. Instead, the application should add entries to the existing files.</p> <p>For the NT platform, documentation must clearly specify the settings for computer peripherals that are required by the application. No undocumented changes to the NT Registry, Windows.ini, System.ini, Config.sys, or Autoexec.bat files shall be made.</p> <p>Review the configuration and installation guide to verify that all modifications to application configuration files are specified.</p>	Not Applicable	1 - 3

UNCLASSIFIED

DOC-19 The application configuration and installation guide shall provide rules defining appropriate file ownerships and permissions for all files and directories that are loaded or modified during application installation.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Application documentation should include information on file ownerships and permissions. This is needed to permit the security officer or administrator to confirm that all ownerships and permissions are set correctly during installation. The information must be included even if the installation is completely automated.	The appropriate application documentation, e.g., Configuration and Installation Guide, Version Description Document (VDD), will be examined for the inclusion of file ownerships and permissions for all files created or modified during configuration and installation of the application.	Applicable	1 - 3

DOC-20 The application configuration and installation guide shall specify the audit configurations (i.e., audit flags, etc.) that must be set in order to meet the application security requirements.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
DoDIIS security policy permits applications to rely on the underlying operating system audit function for auditing of application activity. For such applications, the Configuration and Installation guide must clearly specify the audit flags that must be set in order to meet the application's security concept of operations. If an application does not rely on any auditing by the underlying operating system, then the application documentation should clearly state that no specific settings are required.	Configuration and installation guide will be inspected to verify that audit flags for each supported operating system are specified. This requirement is met if the audit flags are specified.	Not Applicable	2 - 3

UNCLASSIFIED

DOC-21 The application configuration and installation guide shall identify other software products on which the operation of the application is dependent.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Even simple applications may depend upon the presence and operation of third party software. This typically is true for applications that rely on database management systems or on word processing systems. In each case where the application depends upon the presence and operation of third party software, the configuration and installation guide will clearly state the identity of the software, the version and patch level of the software, and the nature of the dependency.	Application configuration and installation guide will state the name, version, and patch level of other software on which the application depends. The nature of each dependency will be stated. The requirement is met if no dependencies exist.	Applicable	1 - 3

DOC-22 Comprehensive instructions shall be provided for uninstalling the application, including backing out of a failed installation so that it can be reinstalled.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Operator errors or script problems may cause the application installation to fail and thus require a partial or total rollback of the installation. Mission application installation should not be like a black box with respect to determining exactly which portions may have been installed before a failure	The requirement will be met by inclusion of rollback instructions in the configuration and installation documentation.	Not Applicable	1 - 3

UNCLASSIFIED

<p>occurred. Additionally, the initial point of failure may not be detected. This means the installation may continue even after part of the installation has failed. The error may be discovered, or the whole installation may fail. During this time, additional undetected errors may occur as consequences of the original error. The residue left from the failed attempt may cause conflicts during the next installation attempt.</p> <p>Without instructions to back out of the installation, the only way to fully insure a clean reinstallation may be to install the entire application from the operating system up. This should be avoided. The installation and rollback strategy should be designed so that the installation would only be rolled back to the point of failure or to the beginning of the segment or module where the error occurred.</p>			
---	--	--	--

DOC-23 Application documentation shall specify the browsers and browser versions that are compatible with the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Application s should test against browser versions that are currently in use in the community (i.e., not only the latest versions). The application documentation should state which browsers are known to be compatible with the application.	Application documentation will be inspected to verify that compatible browsers are identified.	Applicable	2 - 3

UNCLASSIFIED

DOC-24 The application configuration and installation guide shall specify any browser settings that are necessary to access the application.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Applications should not assume specific browser settings because site policy may dictate browser configuration. However, if there are configuration settings that are necessary (e.g., Java enabled), the Configuration and installation guide must identify them.	Application documentation will be inspected to verify that necessary browser settings are identified.	Applicable	2 - 4

DOC-25 If the application design requires the use of plug-ins, the application documentation shall include a list of required browser plug-ins, the source of the plug-ins and appropriate licenses, and DMB approval to use the plug-ins.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Since access to sources for browser plug-ins is extremely limited on classified networks, the administrator or user must be notified before the application is used that a plug-in is necessary. Therefore, the configuration and installation guide must list the plug-ins that are required and how the plug-ins and licenses (if required) can be obtained.</p> <p>Since downloading and installing a plug-in may have security implications, DoDIIS security policy requires that the DMB approve the use of the plug-</p>	<p>Application documentation will be inspected to identify the required plug-ins and the sources for each plug-in. The documents will also be inspected for documentation of DMB approval to use the plug-in.</p> <p>The documentation must also include instructions to install and configure the plug-ins. In most cases, configuration and installation is performed automatically by the browser; any additional manual steps must be included in the</p>	Applicable	1-3

UNCLASSIFIED

in. This approval must be documented in the configuration and installation guide set provided to the JITF.	documentation. This requirement is Not Applicable if the application does not require plug-ins.		
--	--	--	--

DOC-26 If the application design includes implementation of Java applets, the application documentation shall include documentation of application server registration with Intelink Central, documentation of Java applet registration with Intelink Central, and documentation of results of Java applet code review.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>DoDIIS policy requires written documentation of the registration and code review of Java applets. For any application that implements Java applets, the documentation specified in this requirement is mandatory. If the documentation is not provided to the JITF, the JITF must forward to the DMB a "no go" recommendation on the basis of this deficiency.</p> <p>The <i>DoDIIS Instructions</i> do not specifically state which organization is responsible for reviewing Java applet source code. The code review can be done by the security certifiers or a third party organization. It is the responsibility of the PMO to arrange code review.</p>	<p>The application documentation will be inspected to determine if Java applets are implemented.</p> <p>Java applets may be hosted only on servers that are registered with Intelink Central. The server registration process does not produce written confirmation. Proof of registration is demonstration by the listing of the mission application server on the Intelink Central Home Page.</p> <p>The registration of Java applets can be done on-line with Intelink Central. Copies of the registration forms can be included with the mission application documentation as documentation of registration.</p> <p>Documentation of applet code review must include the date of the review, name and address of the reviewer(s), and all findings from the</p>	Applicable	2

UNCLASSIFIED

	review. This requirement is Not Applicable if the application does not use Java applets.		
--	---	--	--

DOC-27 Not applicable for Version 3.0 test procedures.

DOC-28 The application documentation shall specify Uniform Resource Locator (URL) for access to the application as a logical hostname that can be resolved by the site's name resolution service.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The URL is necessary in order to access the application server. It must be specified in the user documentation as a logical host name rather than as a numeric Internet Protocol (IP) address.	Application documentation will be inspected to verify that the application URL is specified as a logical hostname.	Applicable	2

DOC-29 Not applicable for Version 3.0 test procedures.

DOC-30 Application installation and configuration documentation shall identify the use of DoDIIS standard products in accordance with the *DoDIIS Profile of the DoD Joint Technical Architecture (JTA)*.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The DMB publishes the <i>DoDIIS Profile of the DoD Joint Technical Architecture (JTA) and Defense Information Infrastructure Common Operating Environment (DII COE)</i> to maintain continuity	The JTF will review the application Work Plan and the application Installation and Configuration Guide to identify COTS products that are integrated into the application. For each product,	Applicable	2 - 4

UNCLASSIFIED

<p>between DoDIIS and DoD direction with respect to technical and system architecture specifications. Version 3.1 identifies information technologies and software products that will be used in applications fielded at user sites. It defines the community baseline for commonly used support tools, such as browsers, viewers, and database front ends, and infrastructure components, such as operating systems and database management systems. The objective is to provide commonality and consistency among mission application development and integration activities and site configuration activities, reducing the need to maintain multiple baselines of commercial and Government developed products at user sites. <i>The DoDIIS Profile</i> refines and interprets the DoD JTA guidance in areas where that document is open to interpretation.</p> <p>The JTA and the corresponding <i>DoDIIS Profile</i> address many service areas. Most of these areas are currently beyond the scope of integration testing that is performed by the JITF.</p> <p>The JITF supports enforcement of the policies stated in the <i>DoDIIS Profile</i> by verifying that products specified in the <i>DoDIIS Profile</i> are integrated into applications that require the services of those products. The following table lists the products whose use will be verified by the JITF.</p>	<p>the JITF will identify the service that is provided by the product and verify that the product is included in the product matrix provided in the <i>DoDIIS Profile</i>.</p> <p>A waiver process for use of products not listed in the <i>DoDIIS Profile</i> is defined on Intelink at www.dia.ic.gov/proj/dodiis/docs/drafts. If the application uses a non-standard product instead of the standard product listed in the <i>DoDIIS Profile</i>, the application shall provide documentation of the approved waiver to the JITF before integration testing has begun.</p> <p>This requirement is met if the application does not require services of products listed by the <i>DoDIIS Profile</i> OR:</p> <ol style="list-style-type: none"> 1. For each service area covered by the <i>DoDIIS Profile</i> and required by the application, the DoDIIS standard product is used; OR 2. For each non-standard product in a service area covered by the <i>DoDIIS Profile</i>, the application has provided documentation of an approved waiver to the JITF prior to integration testing. 		
---	---	--	--

UNCLASSIFIED

DoDIIS Standards for Integration Requirement DOC-30

<u>DoDIIS Standard</u>	<u>Compliance</u>	<u>Compliance Date</u>	<u>Comments</u>
Java	Use JDK 1.2.1_04		
Mobile Code	Comply with DCID 6/3, section 7 requirements for Mobile Code		
DBMS	Sybase 11.9.2 Oracle 8.1.6	October 2001	Memex users must convert by compliance date.
Stand-Alone Audio	JTA mandates MPEG; plugins such as RealAudio are permitted		
Operating Systems	Solaris 2.7 Windows NT 4.0, SP6A		IRIX permissible for high performance imagery.
Object Technology	Orbix Multi-threaded 2.3c03-10, OrbixTalk 1.2c, and OrbixNames 1.1c		No mandate in DoDIIS; PMs may use object computing environments as desired. PMs who use CORBA should provide bridge to architectures using DCOM.
Desktop Conferencing	Netmeeting 3.0 SunForum 3.0		
Browsers	Netscape 4.7 Internet Explorer 5.5	July 2001	PMs may upgrade to higher versions, but must maintain backward compatibility.
Web Servers	Netscape Enterprise Server 4.0 Netscape Directory Server 4.1.1		
Document Interchange	SGML w/ Amendment 1 HTML 4.0 XML 1.0		MS Office 97, Adobe Acrobat 4.0 are compliant products.
Graphics Data Interchange	JPEG File Interchange Format (JPEG) 1.02 C-Cube Microsystems Portable Network Graphics (PNG) Graphics Interchange Format (GIF) v89a		MS Office 97 is compliant

UNCLASSIFIED

DOC-31 Application administration documentation shall identify locations of log files, temporary files, and audit data. (UNIX and NT) NOTE: New requirement for Version 3.0.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Identifying the location of log files, temporary files, and audit data is essential to the maintenance and administration of the application. The application may use the syslog file, temporary directory, and audit directories provided by the infrastructure. Data base Management System (DBMS) transaction logs are also covered by this requirement. Regardless of location, the application administration documentation should clearly identify them.	Application administrative documentation shall be examined to determine if the file locations are clearly identified.	Applicable	2-4

UNCLASSIFIED

3.2 INSTALLATION AND CONFIGURATION

INST-1 Application installation shall not require installation of the operating system. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>In accordance with the integration methodology developed by the community, installing the application can and should be done on a previously installed and executing operating system. There should be no requirement to reload the operating system simply to install another application. Additional packages/ subsets/resource packs can be added to the operating systems, and the operating system configuration can be modified without requiring a new installation of the operating system.</p> <p>Reloading the operating system means the rest of the system (i.e., other applications) must be backed up and restored. This is a time consuming process, particularly if many workstations in the site are affected.</p>	<p>The requirement is not met if the configuration and installation documentation calls for an operating system reload or if the application's configuration and installation scripts reload the operating system. If the actual installation of the application cannot be successfully completed without reloading the operating system, then the requirement is not met.</p> <p>This requirement does not apply to releases containing operating system version upgrades.</p>	Not Applicable	1

INST-2 Application installation shall not require reinstallation of currently loaded Commercial Off the Shelf (COTS) or Government Off the Shelf (GOTS) applications. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application may require the use of an earlier or	The installation process will be monitored for the	Applicable	1 - 2

UNCLASSIFIED

later version of currently installed software. This does not necessarily violate the objective. The key point in this requirement is that the installation of the application must not assume or otherwise require reinstallation of current applications. If the required version of a key application is already present, then the installation should proceed.	installation of COTS and GOTS software. The requirement is not met if installed software matches the release and version of previously installed software and installs without prompting the user or if the installation process automatically installs additional COTS or GOTS software without checking if the software is already present.		
---	--	--	--

INST-3 The application shall not include bundled support applications. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Support applications are software that are commonly used by either other applications or users. This includes word processors, spread sheets, browsers, and file transfer utilities. These applications are typically provided by a component of the infrastructure. Since these applications are for general use, the application design can assume that necessary support applications are either present or can be readily installed.</p> <p>In some cases, it may be reasonable to bundle third party software in the application installation. This decision should be based on the general utility of the third party software, the cost and ease of procuring that software, and the probability that the site may already possess the software. In all cases, the</p>	<p>The appropriate application documentation (e.g., Configuration and Installation Guide, VDD) will be examined to determine if support applications are included in the distribution of the application. Following the installation of the application, all directories that have been touched by the installation process will be examined to determine if any support applications have been loaded or overwritten.</p> <p>Verify that support applications are NOT bundled with the installed application. Examine the application directory tree and execute the command:</p> <p>UNIX: ls -latR</p>	Not Applicable	2 - 3

UNCLASSIFIED

<p>installation should not force the installation of the bundled software, particularly if the software has been previously installed via another source. A reasonable approach is that the administrator is queried during the installation process whether the software should be installed.</p>	<p>NT: <code>dir /s</code></p> <p>Examine appropriate directories to determine if any support applications have been loaded or overwritten.</p> <p>For each support application that is found, the finding must list the application and its normal source of availability (e.g., Intelink for a browser utility) so that the application installation will be able to specify where to obtain the application.</p>		
--	---	--	--

INST-4 The application shall not include bundled implementations of any standard network protocol. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Since network protocols and services are provided by the common infrastructure, it is outside the scope of applications to bundle them within their own products. Instead, the application must use the application program interfaces provided by the infrastructure. This prevents the inclusion of redundant and potentially non-interoperable software into the site-operating environment and reduces the amount of application software that must be managed. This requirement applies to the use of any network protocol, including Transmission Control Protocol (TCP)/IP and low-speed network communications such as the following:</p>	<p>Verify that the application design does not bundle any implementation of standard network protocols. After configuration and installation of the application, directories (both system directories and directories owned by the application) that have been accessed during the installation of the application will be examined to verify that no network protocol software has been installed.</p> <p>For each directory that was accessed during installation, examine the directory tree and review files (i.e., x-ftp, ftp, etc.) by executing the command:</p>	Not Applicable	2 - 3

UNCLASSIFIED

<ul style="list-style-type: none"> - file transfer protocol - telnet protocol - mail protocols - routing protocol - remote procedure communication (e.g., Remote Procedure Call (RPC)) - windowing protocols (e.g., X11) 	<p>UNIX: <code>ls -latR egrep -v "gif xbm jpg jpeg X"</code> where <i>X</i> is any string that the tester wants to ignore to help minimize extraneous output</p> <p>NT: <code>dir /s</code></p> <p>Verify that the application design and installation does not include bundled implementations of any standard network protocol by inspecting these files.</p>		
--	--	--	--

INST-5 Application installation design shall support installation on user workstations and on application servers for export to user workstations. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
One goal of the common infrastructure is to permit sites to allocate their computing resources according to their needs rather than according to the design of individual applications. An application should be designed so that a site can install it on individual workstations or on an application server.	<p>The application will be loaded on a user workstation. Once the installation is complete, test cases from the application test procedures will be executed to demonstrate the successful execution of the application.</p> <p>The application will be loaded on an application server. The application will be exported for execution by user workstations. Following installation of the application test cases from the application test procedures will be executed to</p>	Not Applicable	2 - 4

UNCLASSIFIED

	demonstrate execution of the application on user workstations.		
--	--	--	--

INST-6 Application shall not modify the native programming utilities and libraries. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In order to increase the portability of applications and to simplify the installation and management of applications, the infrastructure services that are available to applications must be kept stable. Since the infrastructure will provide a common set of services and functions to all applications, an application must not replace or modify parts of the underlying operating system or software run-time environment.	<p>After configuration and installation of the application, the state (i.e., modification time, ownership, etc.) of the directories containing programming utilities and libraries will be compared to the state of these same directories before the application was installed.</p> <p>It is not acceptable for the application to install a library that is a duplicate of a system library. On Unix platforms check the application utilities and library directories by executing the following commands and noting the modification date on each library:</p> <p>For UNIX:</p> <pre>sh # for i in /bin /usr/bin /sbin /usr/sbin /usr/openwin/bin \ /usr/ucb /usr/etc/lib /usr/lib /usr/openwin/lib /etc/lib \ /etc/security/lib > do > echo Checking directory \$i > find \$i \(-mtime -X -o -ctime -X \) -exec ls - latR { } “,”</pre>	Applicable	1 - 2

UNCLASSIFIED

	<p>> done (where X represents time in days [e.g. 3])</p> <p>For NT: Execute the following command noting the modification date on each file with the extension of .DLL or .EXE:</p> <p>dir /s /t:w /a</p>		
--	--	--	--

INST-7 The application shall not require modification of networking protocols or services. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Since network protocols and services are infrastructure services, they are not “owned” by any application. Therefore, modification of these services is not permitted.</p> <p>This requirement also covers dependencies of the application on services such as Network Information Service (NIS) and NIS+ on UNIX platforms. The selection of such a service is a site choice; the application cannot dictate which service the site can use or force the site to modify the network information service configuration of client and server systems. Instead, the application should be designed to operate with either service running or with none running. An application that explicitly requires the use of NIS rather than being capable of</p>	<p>After configuration and installation of the application, the state (i.e., modification time, ownership, etc.) of the directories containing the networking protocols and services will be compared to the state of these same directories before the application was installed. The networking services are found within the standard application directories.</p> <p>Check to see if inetd is configured to start a process differently from the application process for a given service or if the application has added a new, non-standard service by executing the command:</p> <p>For NIS+:</p>	Applicable	1 - 2

UNCLASSIFIED

<p>operating under NIS or NIS+ will not meet this requirement.</p> <p>Since an application cannot assume that it has control over the configuration of workstation resources, it cannot modify the default or standard RPC values. This may cause unpredictable behavior on the part of other applications. The application may append additional RPC values that do not conflict with registered RPC values.</p>	<p>ls -l /etc/services If the time indicates that the file has been modified during the installation, execute the command: cat /etc/services Continue by executing the command: cd /var/nis/data or cd /var/nis/<hostname> ls -l services.org_dir.log If the time indicates that the file has been modified during the installation, execute the command: niscat services.org_dir</p> <p>for NIS: ls -l /etc/services If the time indicates that the file has been modified during the installation, execute the command: cat /etc/services Continue by executing the command: cd /var/yp/src ls -l services If the time indicates that the file has been modified during the installation, execute the command: ypcat services</p> <p>LOCAL: ls -l /etc/services If the time indicates that the file has been modified during the installation, execute the</p>		
---	--	--	--

UNCLASSIFIED

	<p>command: cat /etc/services</p> <p>On Solaris platforms, verify that the "nsswitch.conf" file has not been altered as a result of the application installation. Compare the contents of the /etc/nsswitch.conf file before installation of the application to /etc/nsswitch.conf after installation. There should be no changes to the file.</p> <p>For NT: dir /t:w <winnt_root>\system\system32\drivers\etc\services</p> <p>If the time indicates that the file has been modified during the installation, execute the command: type <winnt_root>\system\system32\drivers\etc\services</p> <p>dir /t:w <winnt_root>\system\system32\drivers\etc\protocol</p> <p>If the time indicates that the file has been modified during the installation, execute the command: type</p>		
--	--	--	--

UNCLASSIFIED

	<p><winnt_root>\system\system32\drivers\etc\protocol</p> <p>Examine the following registry key and subkeys:</p> <p>HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services</p> <p>For UNIX:</p> <p>Verify that the application design does not require overwriting or replacing the native RPC Map and that the installation of the application does not include overwriting or replacing the native RPC Map.</p> <p>The contents of the /etc/rpc file and the rpc map will be examined.</p> <p><u>NIS+:</u></p> <p>ls -l /etc/rpc</p> <p>If the time indicates that the file has been modified during the installation, execute the command:</p> <p>cat /etc/rpc</p> <p>Continue by executing the command:</p> <p>cd /var/nis/data or cd /var/nis/<hostname></p> <p>ls -l rpc.org_dir.log</p> <p>If the time indicates that the file has been modified during the installation, execute the command:</p> <p>niscat rpc.org_dir</p>		
--	--	--	--

UNCLASSIFIED

	<p><u>NIS:</u> ls -l /etc/rpc If the time indicates that the file has been modified during the installation, execute the command: cat /etc/rpc Continue by executing the command: cd /var/yp/src ls -l rpc If the time indicates that the file has been modified during the installation, execute the command: ypcat rpc.bynumber</p> <p><u>LOCAL:</u> ls -l /etc/rpc If the time indicates that the file has been modified during the installation, execute the command: cat /etc/rpc</p> <p>For NT: Examine the RPC registry keys for modifications. Specific keys to examine are: HKEY_LOCAL_MACHINE\SOFTWARE\Description\Microsoft\Rpc HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Rpc HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\RPCLOCATOR HKEY_LOCAL_MACHINE\SYSTEM\CurrentC</p>		
--	--	--	--

UNCLASSIFIED

	ontrolSet\Enum\Root\LEGACY_RPCSS HKEY_LOCAL_MACHINE\SYSTEM\CurrentC ontrolSet\Services\RPCLOCATOR HKEY_LOCAL_MACHINE\SYSTEM\CurrentC ontrolSet\Services\RPCSS		
--	---	--	--

INST-8 Not applicable for Version 3.0 Test Procedures. Requirement converted to OPS-26.

INST-9 The application can be uninstalled using instructions provided in application configuration and installation guide. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Operator errors or script problems may cause the application installation to fail and thus require a partial or total rollback of the installation. Application installation should not be like a black box with respect to determining exactly which portions may have been installed before a failure occurred. Additionally, the initial point of failure may not be detected. This means the installation may continue even after part of the installation has failed. The error may be discovered, or the whole installation may fail. During this time, additional undetected errors may occur as consequences of the original error. The residue left from the failed attempt may cause conflicts during the next installation attempt.</p> <p>Without instructions to back out of the installation,</p>	<p>During installation of the application, the test engineers will record if the installation creates backup copies of system configuration files that are modified by the installation process.</p> <p>Configuration and installation of the application will use incorrect data and/or script errors to induce appropriate installation failures. Following the installation failure, the application will be uninstalled using the instructions provided in application documentation.</p> <p>The requirement is met if the application can be uninstalled successfully, and the installation of the application can be successfully restarted and completed.</p>	Not Applicable	1 - 3

UNCLASSIFIED

the only way to fully insure a clean reinstallation may be to install the entire application from the operating system up. This is a drastic step that should be avoided. The installation and rollback strategy should be designed so that the installation would only be rolled back to the point of failure or to the beginning of the segment or module where the error occurred.	<p>If testing time is available and circumstances permit, after the application has been successfully installed, the application will be uninstalled by following the instructions in the application documentation.</p> <p>The requirement is met if the system is restored to the state existing before the application was initially installed. This includes recovery of all modified files, deletion of any file systems that were created during the application installation, and removal of any system configuration changes that were made during application configuration.</p>		
---	---	--	--

INST-10 The application installer shall not be required to make changes to installation scripts as part of the installation process. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Installation scripts are part of the application baseline. Direct installer modification of configuration and installation scripts violate the concept of a frozen software baseline. Applications should be designed for site integration with choices performed by logical operators like “if” and “case” statements instead of requiring the installer to modify the script code at each site. This is especially true for logical choices involving the various operating systems supported by the application. If physical changes must be made to the	<p>The requirement will be verified during configuration and installation of the application.</p> <p>The requirement is not met if any installation script is opened for editing and any edits are saved. Changes to any installation scripts that are required for the configuration and installation to be successfully completed will be recorded by the JITF. Changes include adding or modifying environment variable declarations, modifying file and directory paths, correcting typographical</p>	Applicable	1 - 2

UNCLASSIFIED

scripts at end sites, the changes should be generated by other code, which is included in the software baseline.	errors, and modifying script logic.		
--	-------------------------------------	--	--

INST-11 The application installer shall not be required to enter extraneous or unnecessary information during installation. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The installer should be prompted to enter only what is necessary.	<p>Input that is required during configuration and installation of the application will be examined for extraneous input.</p> <p>The requirement is met if all input is judged as relevant to the current use of the software.</p> <p>The requirement is not met if the input refers to non-existent objects or purposes that are not part of the design of the current application.</p>	Applicable	1 - 3

INST-12 Manual input for configuration and installation shall be limited to responding to prompts and/or editing configuration file(s) and shall not involve entering information that the script can obtain automatically. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application administrator/installer should not be required to enter large amounts of data during the installation process. The installation process should	Configuration and installation of the application will verify the objective.	Applicable	2 - 4

UNCLASSIFIED

<p>prompt the administrator when input is required, but the amount of information should be kept small in order to lower the probability of input error.</p> <p>Entry of highly technical and product-specific data may increase the difficulty of determining where errors may have occurred during installation. The problem is particularly acute when the commands and data are beyond the knowledge level of the installer.</p> <p>The installation script should not prompt the installer for system or application information that can be obtained automatically. Examples of such information include hostname, addresses and operating system version.</p>	<p>The requirement will not be met if, during the installation, data must be entered that can be obtained automatically by an installation script. The tester will identify the function or command that can be used to obtain the information.</p>		
--	---	--	--

INST-13 The initial configuration and installation parameters shall be consistently set across the software components comprising the application. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>In some cases, inconsistently set parameters are due to a failure to reconcile the parameters between the various modules of the application software. This may happen, for example, when some modules of the application software are redesigned for a new release without examination of the other modules for resulting discrepancies or conflicts. The discrepancies or conflicts may exist in paths</p>	<p>Examine installation scripts and identify parameters (e.g., environment variables, path names, configuration settings) that are initialized more than once, even to the same value.</p> <p>The requirement is not met if:</p> <ul style="list-style-type: none"> the installer must manually set an installation or configuration parameter more than once 	Applicable	2 - 4

UNCLASSIFIED

(including library paths) and environment variables, as set in various modules of the installation script.	or configuration parameter more than once (e.g., initializing the root directory for the application) <ul style="list-style-type: none">the same installation parameter is not initialized with the same value in all cases and must be modified to enable the installation to continue normally.		
--	---	--	--

INST-14 The application shall not reserve an explicit group identifier (ID) or user ID on UNIX platforms or a specific user/group on NT platforms. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Selection of user and group IDs across the community can be difficult. An application cannot assume that any given ID value or range of ID values is not already in use at a site where the application will be installed. Therefore, it is better to refer to logical user and group names instead of specific ID values. The application configuration and installation document may recommend one or more values for IDs, but if it does so, the documentation should also recognize the possibility of conflicts and include steps to resolve conflicts that do occur.	<p>The application configuration and installation guide will be examined for the presence or absence of instructions to add specific IDs for groups or users and users required by the application configuration.</p> <p>The requirement is not met if the installation guide states a specific user ID or group ID that must be used or if the installation script uses a specific user ID or group ID without providing the administrator the option of selecting one.</p>	Applicable	2 - 4

UNCLASSIFIED

INST-15 The application shall not bundle COTS or GOTS software in its directory tree. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>COTS or GOTS software used by the application shall be installed as unbundled applications in accordance with the directory conventions specified in the integration requirements. For example, if an application uses the COTS product XYZmaker, then the product shall be installed in the directory /opt/XYZmaker.</p> <p>There are no standard installation locations on the NT, although %SystemDrive%\Program Files\app is a defacto standard. The application should default to the Program Files directory.</p>	<p>Following installation of the application, the directories containing application files will be examined. Review directories that might contain COTS or GOTS executables and data files by executing the command:</p> <p>UNIX: ls -latR</p> <p>NT: dir /s</p> <p>Verify that COTS or GOTS files are not bundled within the application directory tree.</p>	Not Applicable	2 - 4

INST-16 Installation of the application shall not replace shared resources. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>An application shall not replace or modify a resource such that it is configured solely for the preferences of that application and no other.</p> <p>This reasoning is applied to resources such as utilities, environment declarations, and configuration files that may be used by more than one application.</p>	<p>Inspection of workstation resources will include files that are referenced during booting and initialization of the workstation. These files include inittab, ttytab, and inetd.conf, as well as resources that are referenced by operating system services and user applications during startup and execution, including XKeysymDB, Xdefaults,</p>	Applicable	1 - 3

UNCLASSIFIED

<p>This includes not only the resources provided by the operating system, but also the resources that are provided by the common infrastructure.</p> <p>This requirement has broad uses. It applies to system-wide resources such as operating system functions like printing command shells and X11 resources, and it also applies to resources that are tailored for each user such as .Xdefaults files.</p>	<p>and user preference files such as .cshrc. Appending application specific information to resource files is acceptable. Modifying objects that may be referenced by other applications is not acceptable.</p> <p>UNIX: diff /usr/openwin/lib/X11/XKeysymDB \${X}/XKeysymDB grep -v “!” sort -u > /tmp/XKdiffs (where \${X} is the application directory containing the XKeysymDB file)</p> <p>NT: On NT platforms check the resources directories by executing the following commands and noting the modification date on each resource by executing the commands:</p> <pre>cd \%systemroot%\n dir /s /t:w /a</pre> <p>In the registry, Examine the following key and subkeys:</p> <p>HKEY_LOCAL_MACHINE\\SOFTWARE\\</p>		
--	--	--	--

INST-17 Not applicable for Version 3.0 test procedures.

INST-18 Not applicable for Version 3.0 test procedures.

UNCLASSIFIED

INST-19 Application files shall be contained in a compliant directory structure. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>On UNIX systems, the application directory structure will be compliant with the following format:</p> <p><i><root_dir>/application</i> (where <i>root_dir</i> complies with the directory conventions defined by the infrastructure - e.g., /opt for CSE-SS).</p> <p>As a result, an application that is exported to client workstations shall be located in <i>/export/<root_dir>/hostname#/ application_name</i>. The phrase "hostname#" simplifies distinguishing between network file application (Network File System (NFS)) servers and between disks on the same server by using the disk number (e.g., <i>/export/opt/main_server1/amhs</i>). These conventions clarify the administration of exported applications and simplify the use of the automount function provided by Unix operating systems. This convention applies to all directories found under <i>/opt</i>. For example, if application executables are located on a server, the executable path would be <i>/export/opt/server_name/bin</i>, assuming that only one file system on the server is used for exported files.</p> <p>On NT systems, the application shall be contained in</p>	<p>To verify the location of application files, execute the command:</p> <p>UNIX: # find / -name application_name where "application_name" is the name of the base directory containing application files or # cd /<root_dir>/application_name or # cd /<root_dir>/hostname#/applicatioon_name (where <root_dir> corresponds to the root directory defined by the infrastructure) # ls -latR</p> <p>NT: Start→Find→Files or Folders ... Enter the application name in the 'Named' field and select the appropriate hard drive in the 'Look in' field. Verify that the base directory is located under %systemdrive%\Program Files.</p>	Not Applicable	2 - 3

UNCLASSIFIED

%systemdrive%\Program Files\application_name, where %systemdrive% is the drive identifier where Windows NT is installed.			
--	--	--	--

INST-20 The application shall only use colors defined in the standard color database. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Referencing colors by logical names rather than hexadecimal strings improves the portability of the application. The standard color data base for X11 is defined in the file rgb.txt which is typically located in /usr/lib/X11. The application should reference colors by the names included in this file since all systems that use the X11 windowing system will have the standard color data base.</p> <p>An application may not add new colors to the color data base.</p>	<p>Verify that the application does not redefine color names or numerical color codes. The platform color name data base file will be examined to determine if any changes have been introduced either after configuration and installation of the application or as a result of execution of the application by executing the command: SOLARIS: ls -l /usr/lib/X11/rgb.txt or ls -l /usr/openwin/lib/rgb.txt</p> <p>All application resource files (e.g., .Xdefaults, application files in /usr/lib/X11/app-defaults, etc.) will be examined for specification of colors by hexadecimal strings rather than by ASCII name that appears in the rgb.txt. It is acceptable to reference an existing color by its hexadecimal string. Such practice should be noted. It is not acceptable to reference a hexadecimal string that does not correspond to any color in rgb.txt.</p> <p>This requirement is Not Applicable for NT.</p>	Not Applicable	2 - 3

UNCLASSIFIED

INST-21 The application shall use only fonts from the platform's native font set. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The objective of this requirement is to reduce font problems when a window is exported from one platform to another. UNIX vendors support the MIT X11 fonts almost universally. This requirement does not mean that the actual font encoding must be used. Instead, the fonts (by name) that are used by the application must be in the set distributed in X11R5. The actual font encodings are provided with the platform's X server.</p> <p>Windows NT supports a rich font set. In general, an application should not require a set of additional fonts.</p> <p>COTS applications that are integrated into the application may bring additional fonts with them. These fonts are considered outside the scope of this requirement.</p>	<p>Verify that the application uses the fonts that are provided in the platform's native font set. After the installation of the application, the directories that are touched during application configuration and installation will be examined to verify that the application does not include additional fonts. The application library directories should be checked. Directories, including application directories, should be examined for Motif and X11 libraries by executing the commands:</p> <p>UNIX: cd /usr/lib/X11 ls -latR cd /usr/openwin/lib/X11 ls -latR</p> <p>Verify that the directories reviewed, including application directories, only contain the fonts from the platform's native font set. Review each list, checking the modification times. A modification date during the application installation may indicate that the application is adding additional fonts.</p> <p>The platform's native font set can be viewed by</p>	Not Applicable	2 - 4

UNCLASSIFIED

	<p>issuing the following UNIX command: <i>xlsfonts</i>.</p> <p>NT:</p> <p>Verify that the directories reviewed, including application directories, only contain native fonts from the platform's original font set. Review each list, checking the modification times. A modification date during the application installation may indicate that the application is adding additional fonts to the application. Applications may include a font directory in the application tree. It may be necessary to examine the environment variables set by the application to determine in what directories the application searches for fonts.</p> <p>Check the following Registry areas for font modifications:</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\WindowsNT\CurrentVersion\Font</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE</p> <p>HKEY_CURRENT_USER\Console</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\WindowsNT\CurrentVersion\Font Drivers</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\WindowsNT\CurrentVersion\FontDPI</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\WindowsNT\CurrentVersion\FontCache</p> <p>HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\WindowsNT\CurrentVersion\TrueType</p>		
--	--	--	--

UNCLASSIFIED

	<p>HKEY_LOCAL_MACHINE\SOFTWARE\Micro soft\WindowsNT\CurrentVersion\FontMapper</p> <p>In addition to these Registry entry areas, check the following directory:</p> <p>% Winroot%\Fonts</p> <p>Most changes will be noticeable by changes to the .fon, .fot, or .ttf extensions.</p>		
--	---	--	--

INST-22 The application shall not require specific settings of permissions and ownership of browser files and directories. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
File and directory permissions and ownership must be set in accordance with the site security policy. Default directory permissions after a browser installation enable users to do things such as download plug-ins as needed. This may violate the site security policy, and permissions must be set, after the browser is installed, to conform to the site security policy. The application design must take this and related file or directory configurations into account and be sufficiently robust in order to function properly with any adequate browser that has been installed and configured per site policy.	<p>The permissions and ownerships of the browser files and directories will be recorded before the application is installed. Following successful installation of the application the browser files and directories will again be examined to determine if any file or directory permissions or ownership has changed.</p> <p>The following must be done on the base directory of all browser files:</p> <p>UNIX: # cd [directory containing browser files] # ls -latR</p>	Applicable	2 - 4

UNCLASSIFIED

	NT: cd [directory containing browser files] > for /R %f in (*) do cacs %f		
--	---	--	--

INST-23 Not applicable for Version 3.0 test procedures.

INST-24 Installation of the application client shall not overwrite or modify default browser configuration settings of any user. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Browser configuration settings are typically accomplished by each user rather than as global settings. The installation of the application client should not include an automated modification of any user's default browser configuration settings. Such changes may conflict with either the user's preferences or with site policy. Instead, the application documentation should provide sufficient information that each user can set his/her browser preferences or settings appropriately.	<p>Prior to installing and using the application, the user will start the browser and note the default settings. After the application has been installed and is ready for the general user, the user will start the browser and note the default settings. The default settings should be unchanged.</p> <p>(UNIX) Verify that the time stamps on files in the user's \$HOME/.netscape/ directory were not changed during the installation. Special attention should be paid to the bookmarks.html, cookies, plugin-list, preferences.js, and registry files.</p> <p>(NT) Verify default browser settings in the registry: Start the registry editor (regedit.exe) Open</p>	Applicable	2 - 4

UNCLASSIFIED

	<p>HKEY_CLASSES_ROOT\http\shell\open\command Double-click on 'Default' and observe the setting, e.g.: E:\Program Files\Netscape\Communicator\Program\netscape. exe -h "%1"</p> <p>or "E:\PROGRA~1\Plus!\MICROS~1\iexplor re.exe" -nohome Open HKEY_CLASSES_ROOT\http\shell\open\dde xec\Application Double-click on 'Default' and observe the setting e.g.: (NSShell or IExplorer) Open HKEY_CLASSES_ROOT\http\DefaultIcon Double-click on 'Default' and observe the setting. E.g.: E:\Program Files\Netscape\Communicator\Program\netscape. exe,0</p> <p>or %SystemRoot%\system32\url.dll,0</p> <p>-Repeat the above 10 steps for https.</p> <p>(NT – Netscape) Verify that the time stamps on files in the C:\Program Files\Netscape\Users\admin folder were not</p>		
--	--	--	--

UNCLASSIFIED

	<p>updated during the installation. (NT – Explorer) Verify that the registry settings for HKEY_CURRENT_USER\Software\Microsoft\Internet Explorer have not been modified.</p> <p>This procedure will be performed for each browser installed on the test workstation..</p>		
--	---	--	--

INST-25 Installation of the application client shall not require modification of the user's mail and news configuration. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application implementation cannot assume that the mail and news activities of any user will be accomplished in a particular way. Browsers offer both mail and news functions but sites will vary as to the extent that these functions are used. The application cannot require the use of these features to implement some or all of its functions.	Prior to installing and using the application, the user will note the default mail and news configuration (i.e., which mail and news utilities are executed). After the application has been installed and is ready for the general user, the user will note the default mail and news configuration. The configuration should be unchanged.	Applicable	2

INST-26 The web server directory structure shall be separate from the HTML documents directory. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The http configuration directory is typically	Following installation of the application server,	Applicable	1 - 3

UNCLASSIFIED

separated from the HyperText Markup Language (HTML) documents directory in order to prevent web users from inspecting the server configuration files and discovering potential vulnerabilities.	<p>the HTTP configuration will be examined to determine that the HTML documents directory is separate from the HTTP server directory.</p> <p>(Apache - UNIX)</p> <p>There are 3 configuration files, (httpd.conf, srm.conf and access.conf), that can contain these server settings. The following commands will return the appropriate settings that should be compared:</p> <pre># cd <HTTP server root directory>/conf/ (e.g. HTTP server root directory = /opt/WWW/apache) # grep "^DocumentRoot" *.conf # grep "^ServerRoot" *.conf</pre> <p>(SuiteSpot)</p> <pre><server_root>/admin-serv/config/ns-admin.conf (e.g. server_root = /opt/suitespot)</pre>	Evaluate on Server	
---	--	--------------------	--

INST-27 An “index.html” file or equivalent file capability shall be used to control default web pages. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The use of a web interface to the application server should not permit a general user to browse through the server’s directories and files. The existence of an “index.html” or equivalent file in the directory eliminates the ability of a user to obtain listings of directories and files on the web server. This file is	Following the installation of the application server, the application documents directories will be examined to verify the existence of the "index.html" file in each directory under the Document Root directory.	Applicable Evaluate on Server	2 - 3

UNCLASSIFIED

<p>specified in the server configuration. Without this file, if the URL for the web server specifies only a directory, then the httpd daemon returns a listing of that directory back to the user.</p> <p>If a file other than “index.html” is used, then this file should be specified in the documentation provided by the application.</p> <p>e.g.: .../apache/etc/srm.conf DirectoryIndex index.html index.cgi</p>	<p>If the index.html file is not present, then the 'access.conf', 'httpd.conf' and 'srm.conf' files in the server configuration directory will be examined to verify that an index file is specified. The application directories will be examined to verify that this file exists in each directory under the Document Root directory.</p> <p>After the application server has been installed, the tester will attempt to browse the server directories by forming URLs from segments of the absolute path to web directories.</p> <p>The requirement is met if the tester is unable to obtain a listing of any directory accessed on the web server.</p>		
---	--	--	--

INST-28 All URLs referencing remote hosts shall contain the fully qualified domain names. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Depending upon its implementation/configuration, the browser may permit different settings for intranet (i.e., web sites within an organization’s network) versus internet (i.e., web sites outside an organization’s network). Settings for intranet web sites may be less restrictive than those for internet access (e.g., clients are allowed to execute Java applets from intranet sites but not from internet sites). One method used by Internet Explorer to	The application will be executed through the browser. A representative set of web pages will be traversed and each URL will be noted. The expansion of each URL will be examined to ensure that it identifies the domain name, and allows the viewer to determine whether the link points to an internet or intranet address.	Applicable Evaluate on Server	1 - 3

UNCLASSIFIED

determine if the site was intranet or internet was by the presence of a '.', if one did not exist, the site was considered to be intranet. A complete hostname in the URL will remove the ambiguity between intranet and internet access.			
---	--	--	--

INST-29 Not applicable for Version 3.0 test procedures. Combined with EVN-5

INST-30 Not applicable for Version 3.0 test procedures. Converted to INTSEC-16.

INST-31 Not applicable for Version 3.0 test procedures. Converted to INTSEC-17.

INST-32 Not applicable for Version 3.0 test procedures. Converted to INTSEC-18.

INST-33 Web application file names shall use appropriate file name extension for the content type. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The standard file name extensions are used to improve portability of the application across platforms. The extension is used by a web browser to map the file to the appropriate application (e.g., viewer or plug-in) to view the file. Intelink documentation identifies the following common file extensions that are recognizable by web browsers. Note that this does not assume that the workstation has the needed applications installed; the application documentation should specify the viewers that are necessary for proper execution.	The files in the web server documents directory will be listed using the command: UNIX: # ls -latR NT: > dir /o:d /s For each document file listed in the output, the file name extension will be matched to the Intelink standard file name extensions.	Applicable	1 - 3

UNCLASSIFIED

<u>File Type</u>	<u>Extension</u>			
Plain text	.txt	<p>The requirement is met if the file name extensions used by the application are included in the Intelink list of standard file name extensions. The requirement may also be met if file name extensions are not found on the Intelink list, but the file can be viewed by the commonly used web browsers (i.e., Netscape and Internet Explorer) without additional modification by the user beyond what is stated in the application documentation.</p>		
html document	.html, .htm			
GIF image	.gif			
TIFF image	.tiff			
XBM bitmap image	.xbm			
JPEG image	.jpg, .jpeg			
Postscript fil	.ps			
AIFF sound	.aiff			
AU sound	.au			
QuickTime movie	.mov			
MPEG movie	.mpeg, .mpg			
<p>This is not an all-inclusive list; browsers such as Netscape recognize a larger set of file name extensions, and this list can be modified by a user. The application documentation must include instructions to obtain, install, and configure needed viewers and plug-ins.</p>				

INST-34 Readme files and errata sheets shall contain only last minute and errata type information that could not be incorporated into the final printing of the official configuration and installation guide. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Readme files and errata sheets should not be used for whole portions of the configuration and installation document. Instead, these instructions should be in the formal configuration and installation guide. Typical use of readme files are for last minute and	<p>The contents of the readme files and errata sheets will be reviewed during the installation of the application.</p> <p>The requirement is met when the configuration</p>	Applicable	2 - 3

UNCLASSIFIED

errata type information that could not be added to the deliverable guide before it was printed.	and installation is successfully completed using the configuration and installation document with minimal information, or no information, taken from readme files and errata sheets.		
---	--	--	--

INST-35 The media delivered by the PMO to the JITF will contain only the complete baseline for the release version under test. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The PMO will deliver to the JITF media that reflects the delivery to user sites. The media will include all necessary software and data needed to complete the installation, and will not contain any superfluous information.	After installation of the application, the tester will determine if all data required for the installation was available. The media will be reviewed for superfluous information.	Applicable NOTE: Included if plugins are delivered on removable media versus downloading from Intelink.	1 - 3

INST-36 The installation and configuration of the application shall be completed within 20 working hours. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Installation and configuration covers the entire processing of loading software and modifying configuration files and parameters for successful	The date and time at the beginning of the installation will be recorded. Upon application installation and configuration, the date and time	Not Applicable Plugin installation	1 - 2

UNCLASSIFIED

operation of the application. It does not include loading of application data. The 20 hour limit is 20 sequential hours. If the installation is permitted to execute overnight (e.g., to extract software from media), the overnight hours are included in the time required to install the application.	will again be recorded. Installation is completed after all required steps in the installation and configuration guide are performed successfully AND software verification is performed successfully. The time required to execute the software verification steps is not included in the time to install the application.	should only take minutes.	
---	---	---------------------------	--

INST-37 The application design shall not prohibit installation and operation of the application on a platform shared by other applications. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
One goal of the common architecture is to give the sites flexibility in selecting how each application will be installed and used. An application that, by design, permits sharing of a platform with other application servers allows sites to select platforms based upon application performance and resource usage. An application that, by design, requires a dedicated platform may hinder integration of the application into a site simply because computing resources - i.e., platforms and software - are duplicated unnecessarily. Resource sharing by applications should include more than simply coexisting on the same platform. It should include sharing computing resources such as data servers.	Application configuration and installation guide will be inspected to verify that the ability to share a server platform is specified. During installation and configuration of the application, the test engineers will note the configuration parameters that will prevent the application to operate on a platform shared with other applications.	Applicable	1 - 2

UNCLASSIFIED

INST-38 The application installation must result in a usable application. (UNIX and NT) NOTE: New requirement for Version 3.0.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application installation instructions must be sufficiently detailed to allow for successful installation and operation of the application. It must be demonstrated that the installation was successful and that the application operates as expected. This is normally accomplished by executing a series of verification procedures that can be included in the installation documentation or provided as a separate document.	Upon completion of installation and configuration, the application will be started. Verification procedures will be executed and application operation will be observed.	Applicable	1

UNCLASSIFIED

3.3 ENVIRONMENT

ENV-1 The application shall not modify system files in any way that causes the computing platform to fail to boot if the application client or application server is unavailable. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
An application cannot assume that it “owns” the platform or platform resources. The workstation or server is a user tool, and accessing a specific application is only part of what a user may do during a login session. Since all applications at the site are integrated into the operating environment, the inaccessibility of a particular application does not mean that the user will not be able to perform useful work. The actual booting of the workstation must not be dependent upon the accessibility of any or all application servers. Likewise, a server platform may host one or more server applications. Even on a server platform, the booting process must not be modified to halt or in some way hinder the boot process if the server application is unavailable for some reason.	<p>The application configuration and installation guide will be reviewed to determine if any boot files are modified by the installation. The documentation will also be examined to determine what workstation resource files are modified by the installation. Following installation of the application, the boot files of the workstation will be examined to determine if the modifications made by the application installation process will prevent booting if the application server is unavailable. The files examined will include the init files for the operating system:</p> <p>For UNIX, execute the following commands to determine if any boot files have been modified:</p> <pre>sh # for i in /etc/rc* /sbin/rc* /etc/services /etc/*.conf > do > find \$I \ (-mtime -X -o -ctime -X) -exec ls -latR { } ";" > done</pre>	Applicable	1 - 2

UNCLASSIFIED

	<p>(where X represents time in days). Examine any files returned by the above commands.</p> <p>After successful configuration and installation of the application, on both a server platform and on general user workstations, perform the following:</p> <p>Halt a general user workstation. Halt the host on which the application server executes. After the server host has halted, reboot the user workstation. The workstation will complete its boot sequence and the login screen will be displayed.</p> <p>This requirement is Not Applicable for NT</p>		
--	---	--	--

ENV-2 Execution of the application shall not replace or alter system resources that are used by other applications. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>An application shall not replace or modify a resource such that it is configured solely for the preferences of that application and no other.</p> <p>This requirement applies to workstation resources such as utilities, environment declarations, and configuration files that may be used by more than one application. This includes not only the resources provided by the operating system, but also</p>	<p>On Solaris platforms, the process monitor will be used to identify files that are opened for writing by the application. For each file that is a system or user resource, the test engineer will verify that the application does not overwrite the file or replace any information in the file that is not specific to the application.</p> <p>On NT: The test engineer will perform the</p>	Applicable	1 - 2

UNCLASSIFIED

<p>the resources that are provided by the common infrastructure. Operating system and infrastructure patches are also covered by this requirement; the application cannot back out a patch and replace it with a newer version.</p> <p>The requirement applies to system-wide resources such as operating system functions like printing command shells and X11 resources and to resources that are tailored for each user such as .Xdefaults files.</p>	<p>following (make sure all applications are closed): Start → Run. In the open field enter: Cmd ← In the command prompt enter: >Regedit /e \temp\pre_regedit.txt Then, >dir /s /t:w <i>drive</i>: 2>>\temp\pre_list.err >>\temp\pre_list.txt where <i>drive</i> is each logical disk drive on the system</p> <p>Next, start the application(s) and perform the following at the command prompt: >Regedit /e \temp\post_regedit.txt Then, >dir /s /t:w <i>drive</i>: 2>>\temp\post_list.err >>\temp\post_list.txt where <i>drive</i> is each logical disk drive on the system</p> <p>By comparing the files(\temp\pre_list.txt with \temp\post_list.txt for the registry and \temp\pre_list.txt with \temp\post_list.txt for files), the test engineer will verify that the application does not overwrite or replace any system resource.</p> <p>The test engineer will verify that patches have not been backed out during the application installation.</p>		
--	---	--	--

UNCLASSIFIED

ENV-3 The application shall not prevent or alter login if the application server or client is unavailable. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Stopping the execution of the application server software, halting the host on which the application server executes, or modifying the client application configuration so that the application client software is unavailable will not affect the user's ability to login to the workstation.	<p>After successful configuration and installation of the application on both a server platform and on general user workstations, perform the following:</p> <p>Stop the execution of the application server software. The operating system and other services of the host on which the application server executes will still be available. After the application server has stopped, ping the host to verify that it is running and accessible. Login to a general user workstation. The login will complete normally and the user will be presented with the session environment and desktop, if one is configured for that session.</p> <p>Halt the host on which the application server executes. After the host has halted login to a general user workstation. The login will complete normally, and the user is presented with the session environment and desktop if one is configured for that session.</p> <p>Restart the server host and the application server software. On a general user workstation, modify the client application configuration so that the application client software is unavailable. This can be done by either a) moving the client</p>	Applicable	1 - 2

UNCLASSIFIED

	executable file(s) to an inaccessible location on the user workstation or b) temporarily renaming the client executable file(s). If the client server is obtained via file sharing from an application server, either a) or b) must be done on the application server. Access to the application server is not altered. Once this has been completed, log out of the workstation. Login to the general user workstation as a general user. The login will complete normally, and the user is presented with the session environment and desktop, if one is configured for that session.		
--	---	--	--

ENV-4 The client application(s) of the application shall launch from the background menu or from an icon on the desktop. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
This objective verifies that the client applications for the application will launch successfully from the background menu selection or by initializing the application from an icon on the desktop.	Following configuration and installation of the application on the general user workstation, the background menu item(s)/icon corresponding to the application will be selected. Selected test cases from the application test plan will be executed if normal operation of the application is not readily apparent. The requirement is not met if the application can only be started by the user from a command line.	Not Applicable	2

UNCLASSIFIED

ENV-5 Any application-required daemons shall be started automatically when the platform boots. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Daemons should start automatically in order to be available to requests from users at all times when the platform is operating. A daemon can be started at the time the platform boots (e.g., by execution of a boot script during system booting). It can also be spawned by a system process (e.g., "inet.d") whenever a user request is received. The administrator should not be required to manually start the daemon for normal operation.	<p>The requirement is not met if daemons or processes for the application must be started manually.</p> <p>If the application design implements restart of the daemons or processes for the application during system reboot, the platform will be halted and rebooted. Following the completion of the reboot, the process table will be examined. The requirement is met if the daemons or processes for the application are executing.</p> <p>If the application daemons or processes are spawned by a system process upon receipt of a user request, the platform will be set in an idle state (i.e., no user requests are being processed or are pending). The process table will be examined to verify that no daemons for the application are executing. A request for data will be transmitted from a client application for the application. The process table for the platform will be examined again to verify that application daemons/processes are now running.</p>	<p>Applicable</p> <p>Evaluate on Server.</p>	2-3

UNCLASSIFIED

ENV-6 Application environment variables shall be defined at launch time and in the form of PRODUCT_VARNAME. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>For UNIX systems, developers should assume that the following variables are global and have been defined by the site: PATH, HOME, TERM, TZ, LOGNAME, SHELL, and TMPDIR. The developer shall only define variables that are specific to the application and follow the format specified in this requirement. By following the variable naming convention, the probability that the application may overwrite or redefine variables of other applications is limited.</p> <p>Note that variables that are defined locally to the execution of the application (e.g., from a launch script) will not conflict with variables that are defined either globally or locally by other applications. Local definition of variables is preferred to globally defining variables that have meaning only to one application.</p> <p>For NT, there are several environment variables reserved: ComSpec, LOGONSERVER, HOME_DRIVE, HOME_PATH, NUMBER_OF_PROCESSORS, OS, PATH, PATHEXT, PROCESSOR_ARCHITECTURE, PROCESSOR_LEVEL, PROCESSOR_REVISION,</p>	<p>The application configuration and installation guide will be examined to verify that environment variables initialized by the application are defined in the form of PRODUCT_VARNAME.</p> <p>Following configuration and installation of the application, the launch scripts used to invoke execution of the application will be examined to verify that all environment variables initialized in the launch scripts also follow the required format. The examination will include any data added to the infrastructure session management configuration files during the configuration and installation of the application.</p> <p>On NT: In addition to the above screening, the test engineer will perform the following (make sure all applications are closed): Start → Run. In the open field enter: Cmd ← In the command prompt enter: >Regedit /e \temp\pre_hkey_current_user.txt “HKEY_CURRENT_USER” ←</p> <p>Next, start the application(s) and perform the</p>	Applicable	2 - 3

UNCLASSIFIED

<p>SYSTEM_DRIVE, SYSTEM_ROOT, TEMP, TMP, USERDOMAIN, USERNAME, USERPROFILE, WINDIR</p> <p>NOTE: If PATH references the environment variable %SystemRoot%, the environment variable must appear first. If %SystemRoot% is not used to refer to the Windows NT Directory in the Path Statement, then the order of the path statement does not matter.</p> <p>For example, if the PATH is set to “%SystemRoot%;C:\”, it must appear in that order – it cannot be “C:\;%SystemRoot%”. However, if PATH is set to “C:\WINDOWS_NT;C:\”, then the order does not matter, since the environment variable does not have to be resolved.</p>	<p>following at the command prompt: >Regedit /e \temp\post_hkey_current_user.txt “HKEY_CURRENT_USER” ←</p> <p>By comparing the files(/temp/pre_hkey_current_user.txt with /temp/post_hkey_current_user.txt), the test engineer will verify that the application does not overwrite or replace any reserved environmental variables.</p>		
--	--	--	--

ENV-7 Not applicable for Version 3.0 test procedures.

ENV-8 The application will successfully pass the Sun Microsystems’ Application Certification evaluation. (Solaris only) NOTE: New requirement for version 3.0

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The Solaris Application Binary Interface (ABI) standard defines the runtime interfaces that are safe and stable for application use. Applications designed to this standard are more likely to operate on subsequent releases of the Solaris Operating System. Items that are evaluated include: Private	Following the installation of the application, the Solaris <i>appcert</i> utility will be utilized to evaluate the application’s conformance to the Solaris ABI standard. The report that is generated identifies interface dependencies for each object file (executable or shared object) to determine all the	Applicable	3 - 4

UNCLASSIFIED

<p>symbol usage in Solaris libraries (interfaces that Solaris libraries use to call one another. These are not intended for developer use); static linking of libraries; and use of unbound symbols (i.e. functions or data) which could indicate an environment problem or a build problem.</p> <p>The <i>appcert</i> executable is available at Sun Microsystems' web site.</p>	<p>Solaris system interfaces that are depended upon. These dependencies are compared to a definition of the Solaris ABI to identify any interfaces that are private (unsafe and unstable for application-level use).</p>		
---	--	--	--

UNCLASSIFIED

3.4 OPERATION

OPS-1 Application file names shall consist of valid characters for file names and shall be restricted to the maximum length of 128 characters for UNIX/Solaris systems and 255 characters for Windows NT systems. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>This requirement is a general requirement for all files stored on a workstation or server. Valid characters for file names on UNIX/Solaris are defined in the X/OPEN XPG4 recommended character set, and in the Microsoft Logo specifications for Windows NT.</p> <p>Valid characters are 0-9, Aa-Zz, . (dot) + (plus), - (minus), : (colon) and _ (underscore). Other characters are invalid because they may have meaning as meta characters, have meaning to the shell, or be difficult to reproduce (i.e., hidden characters).</p> <p>On NT systems, \$ and space characters are acceptable.</p>	<p>To verify the files created do not exceed the 128 character limit, execute the command:</p> <p>UNIX: ls -latR</p> <p>NT: dir /s /t:w /a</p> <p>View the output of this command and verify the structure and length of each file or directory name.</p> <p>This procedure must be done for each directory touched by the application installation.</p>	Not Applicable	2 - 4

OPS-2 The application shall use the platform's native keyboard map. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
On Unix platforms, the keyboard, including the	Typically, keyboard map modification is done in	Not Applicable	1 - 2

UNCLASSIFIED

<p>mouse buttons, is owned by the X server, but it is a shared resource. Keyboard mapping refers to the mapping of the physical keys, which are identified by "keycodes", to events passed by the Xserver to a client application. The events are described by "keysyms". Each keycode is mapped to one or more keysyms. The actual keysym (interpretation of the pressed key) depends upon the actions of modifier keys (Shift, Caps_Lock, etc). The list of keysyms associated with a specific keycode can be changed by any application. Since the keyboard is a shared resource, any changes made by one client application are global to all applications. Therefore, problems can occur when individual applications remap the keyboard for their own purposes.</p> <p>A subtler issue is the definition of keysyms, since these values determine the actions of the mouse and the appearance of characters in a client window. Keysyms are defined in /usr/lib/X11/XKeysymDB (or /usr/openwin/lib/X11/XKeysymDB). The infrastructure provides a default XKeysymDB file. Altering this file does not change the keyboard map. applications may append (but not overwrite) to this file or may actually refer to a different XKeysymDB file, providing that this reference is not global to all applications. Most applications will have no need to use anything but the default XKeysymDB file.</p> <p>Under NT, there is no file map file. File map information is maintained in the NT registry.</p>	<p>an application launch script via the "xmodmap" utility. To evaluate this requirement, execute the command:</p> <pre>cd /<scripts directory> grep xmodmap *</pre> <p>If this command finds any xmodmap commands in the application's scripts, the application is likely modifying the keyboard map. This can be determined by the options passed to the xmodmap command. The -e option is used to change either a keysym listing or a mapping of keysyms to a keycode.</p> <p>Alternatively, the xmodmap command can be used to capture the current keyboard map. Prior to starting the application, execute the following commands:</p> <pre>xmodmap -pm >/tmp/mod.map (modifier map) xmodmap -pk >/tmp/key.map (keyboard map) xmodmap -pp >/tmp/pointer.map (pointer or mouse map)</pre> <p>After starting the application, repeat the three commands in a separate command window and save the output to three different files (e.g., mod1.map, key1.map, pointer1.map). Compare the contents of the pairs of maps by either inspection or via the "diff" command. If the application has not changed any of the maps, then there will be no differences.</p>		
---	---	--	--

UNCLASSIFIED

<p>However, it is possible for an application to modify the native mapping of characters for the specific application.</p>	<p>The application may append keysym entries to the default XKeysymDB file. Compare the XKeysymDB file prior to application installation to the file after the application has been installed. The requirement is not met if any keysym entries have been overwritten.</p> <p>The application may install and use a different XKeysymDB file than the one found in <i>/usr/lib/X11</i>. The application must set the environment variable XKEYSYMDB to the path of this alternate file. This variable must be set locally; the requirement is not met if the variable is set globally. The variable is set globally if it is initialized at the time of user login. To determine if the variable has been set globally do the following:</p> <p>On the command line before starting the installation enter:</p> <pre>echo \$XKEYSYMDB</pre> <p>Verify that the variable has no value. For NT:</p> <p>For the mouse:</p> <p>HK_LOCAL_MACHINE\HARDWARE\DeviceMap\PointerPort Record the data path to all the values listed (i.e.</p>		
--	--	--	--

UNCLASSIFIED

	<p>\REGISTRY\Machine\System\ControlSet001\Services\i8042prt)</p> <p>Record the following value/data pairs of the Parameters key for each entry recorded above (i.e. \REGISTRY\Machine\System\ControlSet001\Services\i8042prt\Parameters)</p> <p>MouseDataQueueSize (100)</p> <p>NumberOfButtons (2)</p> <p>PointerDeviceBaseName "PointerPort"</p> <p>SampleRate (40)</p> <p>MouseResolution # if present</p> <p>Record all the value/data pairs listed in the following key:</p> <p>HK_CURRENT_USER\Control Panel\Mouse</p> <p>For the Keyboard:</p> <p>HK_LOCAL_MACHINE\HARDWARE\DeviceMap\KeyboardPort</p> <p>Record the data path to all the values listed (i.e. \REGISTRY\Machine\System\ControlSet001\Services\i8042prt)</p> <p>Record the following value/data pairs of the Parameters key for each entry recorded above</p>		
--	---	--	--

UNCLASSIFIED

	(i.e. \REGISTRY\Machine\System\ControlSet001\Services\i8042prt\Parameters) KeyboardDataQueueSize (100) OverrideKeyboardType # If present OverrideKeyboardSubtype # If present KeyboardDeviceBaseName "KeyboardPort" Record all the value/data pairs listed in the following key: HK_CURRENT_USER\Control Panel\Keyboard		
--	---	--	--

OPS-3 The execution environment that exists at the time of application launch shall not conflict with either the user's overall operating environment or the execution environment of other applications. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The execution environment of the application is defined by the environment variables set by the operating system, the infrastructure, and the application. The execution environment should not result in ambiguous or incorrect references to commands or files due to assumptions by the application with regard to environment settings. Additional areas of conflict in the execution environment include keyboard mapping, use and modification of files shared with other applications operating system configuration files, and use and	Evaluation of this objective is accomplished by: 1. Evaluating the integration of the application into the infrastructure sessions and the associated definition of global variables. UNIX: execute 'set' and at a minimum note the following variables: PATH and LD_LIBRARY_PATH NT: right-click on 'My Computer'→'Environment' tab, at a minimum note the following variables: Os2LibPath and Path,	Applicable	1 - 2

UNCLASSIFIED

modification of root window resources.	<ol style="list-style-type: none">Identifying operating system configuration files that are modified during application installation and configuration.Reviewing the launch scripts for definition of global variables and reference/modification of shared resource files.Identifying changes, if any, to the keyboard map and root window resources.Evaluating changes (if any) in the application's processing parameters.		
--	--	--	--

OPS-4 The application shall not contain configuration files or tables that duplicate information already contained in the operating system configuration files. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application design should not include duplicate information that is already contained in and distributed by the common infrastructure. This includes information that is available from an operating system service such as NIS/NIS+ and information that is maintained by other infrastructure services such as Domain Name Service. Duplication of this type increases the risk of losing synchronization with other applications that are utilizing the same information. For example, placing the name and IP address of the application server in an application configuration file can affect the execution of the application. An update to the application configuration file would also be required	<p>The application design documentation and configuration and installation guide will be inspected to determine if any redundant information is being maintained by the application.</p> <p>After the application has been installed, the configuration files created or modified by the application will be inspected for inclusion of redundant information. Redundant information will include, for example, host name/IP address pairs, reserved port numbers (except for the application itself), and the local host name.</p>	Not Applicable	1 - 3

UNCLASSIFIED

if the IP address is changed by the system administrator. Unless the application administrator has kept detailed configuration records, he/she may not be aware that this must be done until the application fails to execute properly.			
---	--	--	--

OPS-5 The application shall not use extensions to the Window System that are not supported by the infrastructure. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>X Window System extensions improve the ability of the workstation to display graphics such as post script or animation. In order for applications to operate on any platform that uses the X Window System, the application must implement and comply with a common set of extensions.</p> <p>The X Consortium defines a set of extensions to the X Window System. In order for an application to use any extension in this set, the X server must support the extension, and the necessary library must be present on the platform that is executing the application. The X server provided by the Solaris operating system supports the following X extensions:</p> <ul style="list-style-type: none"> - Display Post Script (DPS) - X Input Extension - Double Buffer Extension - Shape Extension - Shared Memory Extension 	<p>If the application uses extensions to the window system that are not supported by the infrastructure X server, it must either place additional libraries in the standard system directories, such as /usr/openwin/lib or modify the library search path via the environment variable LD_LIBRARY_PATH. In addition, the X server must be modified or replaced to support the additional extensions.</p> <p>After installation of the application, the directories that are touched during application configuration and installation will be examined to verify that the application does not include or bundle additional libraries for the window system extensions. The installation must not overwrite any operating system libraries.</p> <p>The native X server will be checked to verify that it has not been replaced during installation of the</p>	Not Applicable	2 - 3

UNCLASSIFIED

<ul style="list-style-type: none"> - Miscellaneous Extension - XC-MISC - X Imaging Extension <p>The extensions require the libraries "libXext", "libXi", and "libdps*" in /usr/lib/X11 (/usr/openwin/lib/X11). These libraries are part of the infrastructure, and the application does not need to add them during installation.</p>	<p>application. If the application installation includes loading of an X server, the documentation will be examined to determine if the execution of the application requires using this X server in place of the native X server.</p> <p>The requirement is not met if the application adds additional X extension libraries to the platform during installation, overwrites the native X extension libraries, or if an additional X server is loaded on the platform during application installation and is required for execution of the application.</p> <p>This requirement is Not Applicable for NT.</p>		
--	--	--	--

OPS-6 The application shall use the infrastructure print utility for printing hard copy. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>This requirement is applicable for both application client and application server processes and assumes that destination printers are managed by the infrastructure print management utility. An application should not control or otherwise direct printing; this should be done instead by the infrastructure printing service.</p>	<p>Hard copy printouts will be generated and inspected for correct banner markings.</p> <p>NT: Check the following files pre and post install:</p> <ul style="list-style-type: none"> • %systemroot%\system\winspool.drv • %systemroot%\system32\winspool.drv • %systemroot%\system32\spoolss.exe • %systemroot%\system32\spoolss.dll 	Not Applicable	2 - 3

UNCLASSIFIED

	<ul style="list-style-type: none"> • %systemroot%\system32\spool\prtprocs\w32x86\winprint.dll <p>Additionally, print functionality of the application can be compared to other previously installed applications, e.g.: Microsoft Word.</p>		
--	--	--	--

OPS-7 Administration of the application shall not require access to superuser accounts. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Once the application is installed and configured, administrative functions that specifically address access to and operation of the application should not require logging in as root or as an administrator. This approach reduces the probability that administrative changes for one application may affect the operation of other applications or the operation of the workstation or server platform itself.</p> <p>Access to application administration functions can be implemented in one of several ways:</p> <ol style="list-style-type: none"> 1. A functional user ID can be used. This ID is placed in a restricted Unix group for application administrative functions. In this approach, the administration functions are typically available through menu selections in an application window. 2. The user ID that is used for application 	<p>After the application has been installed, executable files that provide administrative functions will be identified. The permissions on each file will be examined to verify that the application administrator does not require superuser (root on Unix and administrator on Windows NT) privileges to manage the application.</p> <p>UNIX: # ls -al ; -verify permissions</p> <p>NT: c:\ cacls [filename(s)] ; -verify permissions</p>	Applicable	1 - 3

UNCLASSIFIED

<p>administration is a separate user ID that reflects the greater privilege and trust required for application administration.</p> <p>3. The application administration functions are accessible by user IDs that are associated with administration of site software. The use of an infrastructure trusted role is appropriate in this approach.</p> <p>The application design may require a combination of the approaches listed above. For example, an application may provide administrative functions from its main window to certain user IDs and also require access to a privilege user ID for data base administration.</p>			
--	--	--	--

OPS-8 The administrator shall be provided with utilities and tools to add, modify, or delete application users. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>This objective refers only to managing users of the application, not to the definition and management of workstation users (i.e., Unix or NT accounts). The latter is performed via the infrastructure user management tools. Many applications will not provide or need any tools other than infrastructure User Management. User management should be limited to doing what is needed to give the user access (or take away access) to the application and its data. If access can be achieved by using the</p>	<p>The application administration documentation will be reviewed to identify the approach to application user management. The tools to add, modify, or delete application users will be identified. After the application has been installed, the identified tools will be located. The tools will be evaluated to determine if any of the tools is a redundant implementation of an operating service or infrastructure, including data base management, service, etc.</p>	<p>Applicable</p>	<p>1 - 2</p>

UNCLASSIFIED

already existing tools of the infrastructure, then no additional utilities are required. In the case of applications that rely on databases, the management tools of the data base management application are sufficient, and the application does not have to provide additional, redundant tools.	This requirement is Not Applicable if the application does not provide and does not require additional tools to manage application users.		
---	---	--	--

OPS-9 The application shall use infrastructure management utilities to manage and distribute application, user, and security data. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application developer must use the management services of the common infrastructure wherever it is appropriate. Since the trend is toward shrink-wrapped applications, there should be, in general, few requirements for an application to manage system resources such as user data and security data. Management requirements for the application must pertain solely to areas of management that are specific to the application rather than to areas of management that pertain to the system in general.	<p>The appropriate application documentation (e.g., Software Design Document (SDD), Trusted Facilities User's Guide (TFUG)) will be examined to verify that application, user, and security management are performed with infrastructure management utilities. The administration tools provided by the application will be identified.</p> <p>After the application has been installed, the administration tools will be exercised to evaluate their functions. Executing the tools will verify that the application utilities do not duplicate infrastructure tools to manage and distribute application, user, and security data.</p>	Not Applicable	1 - 3

UNCLASSIFIED

OPS-10 Application execution shall not fill or result in exhausted file system space. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Many applications use files that are continually increasing in size. Such files are log files, temporary files, and audit files. If the application relies on the syslog file, temporary directory, and audit directories provided by the infrastructure, then managing these growing files becomes the system administrator's responsibility and is no longer the responsibility of the application. However, if the application places its logs, temporary files, and/or audit data in other locations, then the application documentation should clearly identify these locations. Additionally, the application design should account for these growing files and provide the means to automatically reduce them as needed.</p> <p>Data base Management System (DBMS) transaction logs are also covered by this requirement. If the application implements a transaction log within the DBMS, then the application administration documentation must provide guidelines to ensure that the log does not exhaust space within the DBMS and stop the DBMS. This is particularly critical if the application is one of several applications sharing a data server; the transaction log associated with the application could crash the data server, thus causing disruption of service to other applications.</p>	<p>During execution of the application, the application process will be monitored via the "truss" process to identify files that are opened for writing by the application. For each such file identified, the test engineer will evaluate if the file has the potential to exhaust file system space. If this condition is met, the test engineer will verify that each file is managed to avoid exhausting file system space (e.g., deletion or compression of the temporary files).</p> <p>If the application uses a DBMS, then the application administrator must be aware that the transaction logs must be managed.</p> <p>The application administration documentation will be examined to verify that guidance for managing the transaction log is provided.</p> <p>For NT:</p> <p>Event Viewer logs automatically stop logging or purge themselves when the maximum log size value is met. For Applications that do not register their logs with the Event Viewer, review</p>	Not Applicable	1 - 3

UNCLASSIFIED

	<p>directories that might contain application log files by executing the command:</p> <p>dir /s /t:w /a</p> <p>Evaluate if the file has potential to exhaust file system space. If this condition is met, the test engineer will verify that each file is managed to avoid exhausting file system space.</p>		
--	--	--	--

OPS-11 The loss of connectivity between the application client process and the application server process shall not affect the behavior or operation of other client workstation applications or utilities. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Connectivity refers to the ability to pass protocol data units (e.g., packets, TCP/IP transmission units) between the application client process on the user's workstation and the application server process executing on either the same workstation or on another platform. From the perspective of the user, connectivity can be lost if the server process is terminated unexpectedly or if the network path between the two processes is broken in some way. The loss of connectivity should not cause other processes on the workstation, including the operating system, to operate incorrectly, such as hanging or terminating unexpectedly. The application itself may hang or terminate depending	<p>The objective will be verified in two ways:</p> <ol style="list-style-type: none">1. The application server process will be terminated during an application client session with the server without normal notification to the client. The operation of the user's workstation will be evaluated to determine that no process, other than the application client process itself are affected.2. The network connection between the application server process and the application client process will be broken during a client session. This can be efficiently accomplished by disabling the network interface of the platform on which the server process is	Applicable	1 - 2

UNCLASSIFIED

upon the application design. For browser-based applications, the browser itself may hang. It is acceptable that the web access/transfer can be stopped or the window closed. In some cases, the browser may have to be terminated; this is outside the scope of this requirement.	executing. This does not affect the operation of the network itself. The operation of the user's workstation will be evaluated to determine that no process other than the application client process itself is affected. UNIX: # ifconfig -a (get interface which contains IP address of host, e.g: le0) # ifconfig [interface] down e.g.: ifconfig le0 down -perform tests #ifconfig [interface] up e.g.: ifconfig le0 up NT: Removal of the NIC category five cable will facilitate a loss of network connection.		
---	---	--	--

OPS-12 Disorderly termination of the application shall not affect the execution or behavior of other applications. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The activity of the application should not affect the activity of other applications executing on the same platform or in the same operating environment (i.e., the user site). Disorderly termination can occur if the application exits due to a software error or invalid user action or if the application is unexpectedly halted by a user or administrator action. Other applications should	This objective will be verified in the following manner: 1. The application will be started in a typical user session. At various points in the session (e.g., initial startup, data transfer/review, query/response), the client application will be terminated by using the "kill" command from a shell window. For web-based applications, the browser is considered the client	Applicable	1 - 2

UNCLASSIFIED

<p>continue to operate normally when such events occur.</p>	<p>application.</p> <p>2. The application will be started in a typical user session. At various points in the session (e.g., initial startup, data transfer/review, query/response), the user will log out of the workstation without first exiting the application.</p> <p>In both cases, the operation of the user's workstation will be evaluated to determine that no other processes are affected.</p> <p>In order to test the effect of disorderly termination of the application server processes, the following steps should be followed for servers that are using the DBMS.</p> <pre># cd .../sybase/bin/isql -Usa -P<sa password> 1>shutdown SYB_BACKUP (To shutdown the backup server) 2> go 1> shutdown (Shuts down the main data server) 2> go # sync # sync # halt</pre> <p>If the data server is shared among several applications, then these applications will be affect by these steps.</p>		
---	--	--	--

UNCLASSIFIED

	<p>Verify that applications and operating system services running on the same platform as the data server are still running properly.</p> <p>Restart the data server. Terminate the application server processes. Verify that the applications and operating system services running on the same platform as the data server are still running properly.</p> <p>This requirement is Not Applicable for NT.</p>		
--	--	--	--

OPS-13 Disorderly termination of the application shall not result in incorrect behavior of the application when the application is restarted. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Disorderly termination can occur if the application exits due to a software error, invalid user action, or if the application is unexpectedly halted by a user or administrator action.</p> <p>The application itself should recover from the disorderly termination and execute properly when restarted. This may be difficult to achieve for application server processes, such as data base servers. The application design should plan for the likely occurrence of disorderly termination so that recovery will be possible.</p>	<p>This objective will be verified in the following manner:</p> <ol style="list-style-type: none">1. The application will be started in a typical user session. At various points in the session (e.g., initial startup, data transfer/review, query/response), the client application will be terminated by using the “kill” command from a shell window.2. The application will be started in a typical user session. At various points in the session (e.g., initial startup, data transfer/review, query/response), the user will log out of the workstation without first exiting the	Applicable	1 - 2

UNCLASSIFIED

	<p>application.</p> <p>3. The application server application will be started. While users are accessing the server via client application applications, the server will be shut down. For an application that uses a DBMS, the database server will be shut down via ISQL first in order to avoid corruption of the database. The steps outlined in OPS-12 will be used.</p> <p>Following each case, the application will be restarted, and the normal operation of the application will be verified.</p> <p>This requirement is Not Applicable for NT.</p>		
--	---	--	--

OPS-14 Orderly termination of the application shall not affect the execution or behavior of other applications. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>If the normal process of starting and stopping the application affects the operation of other processes on the workstation or of the application itself when it is invoked again, the application design is unsatisfactory.</p> <p>Sample test scenarios will be performed in which the application is started, used in typical manner, and then terminated by the recommended steps.</p>	<p>This objective will be verified in the following manner:</p> <p>The application will be started in a typical user session. At various points in the session (e.g., initial startup, data transfer, query/response), the client application will be terminated by using the “exit” command or button from the application main window. The application server application will be started. While users are accessing the server via client application applications, the server will be shut down using the application</p>	Applicable	1 - 2

UNCLASSIFIED

	documented steps for stopping the server. Following each scenario, the operation of the user's workstation will be evaluated to determine that no other processes are affected.		
--	--	--	--

OPS-15 Disorderly shutdown of the client workstation while the application is executing shall not affect the behavior or operation of the application on other workstations. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
There should be no effects that are attributable to the application on other workstations if the user's workstation is shut down while the application is active. Once the workstation or server platform is rebooted and the application is restarted, the application should execute normally.	The application will be started on the user's workstation. Once the application is active, the workstation will be shut down (i.e., halted). The application processes on other workstations in the test environment will be evaluated for normal operation.	Not Applicable	1 - 2

OPS-16 Disorderly shutdown of the client workstation while the application is executing shall not result in incorrect behavior of the application when the application is restarted. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
There should be no effect on other workstations that are attributable to the application if the user's workstation is shut down while the application is active. Once the workstation or server platform is rebooted and the application is restarted, the application should execute normally.	The application will be started on the user's workstation. Once the application is active, the workstation will be shut down (i.e., halted). After the workstation is rebooted, the application is restarted, and the normal operation of the application will be verified.	Not Applicable	1 - 2

UNCLASSIFIED

	UNIX: # sync;sync;halt NT: Power off and reboot		
--	--	--	--

OPS-17 User logout of the client workstation while the application is executing shall not affect the behavior of the application or the behavior of other applications in the user's next login session. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Once the user logs in to the workstation and invokes the application, the application should execute normally. The application may not execute normally if the user logs out and consequent termination of the application leaves a residue of lock files and similar objects that will affect the behavior of the application. However, the application should be able to recover either by specific actions of the user or after a period of time. There should be no effect on other applications that are started in the user's next login session	Test scenarios will be run in which the application is started and the user logs out at various points in the scenario. After the user logs back into the workstation, selected applications will be run, and their normal operation will be verified. The next scenario will be started by launching the application, and the normal operation of the application will be verified. Following the verification, the user will log out of the workstation at a different point in the scenario. The requirement is met if, for all scenarios: (a) Normal operations of other applications are not affected, AND (b) Normal operation of the application is not	Applicable	2 - 4

UNCLASSIFIED

	<p>affected. If the application does not operate normally immediately but does recover either by a user action or after a period of time, condition (b) is met.</p> <p>The requirement is not met if any process associated with the application remain active after the user logs out.</p>		
--	---	--	--

OPS-18 The application shall exhibit consistent behavior across all supported operating systems and platforms. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The application design should enforce a uniform look and feel across all of the platforms and operating systems supported by the application. Limitations due to the hardware and operating system that prevent a uniform look and feel should be identified in the application design documentation. There should be no differences in the functions provided by the application to the user regardless of the platform and operating system.	Ad hoc testing will be performed on each platform in the test environment that is supported by the application. A combination of testing and inspection will be used to verify that there are no differences in the application function regardless of the platform and operating system.	Applicable	1 - 3

OPS-19 The application shall not duplicate functions provided by support applications. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
A primary objective of establishing a common infrastructure and common support applications for	The application configuration and installation guide will be examined to verify that the	Applicable	2 - 4

UNCLASSIFIED

user sites is to eliminate the redundant implementations of functions by applications. An application must only implement functions that are specific to its scope. Otherwise, it must use the services provided by the infrastructure support applications.	application does not include functions that are provided by support services. After installation of the application, the application directories will be examined for modules that duplicate support services. Verify that the application is not duplicating functions provided by support applications. Examine the application directory tree and execute the command: UNIX: ls -latR NT: dir /s /t:w /a Examine appropriate directories to determine if duplicate support services are being used.		
--	---	--	--

OPS-20 The application shall use shared libraries for UNIX/Solaris and DLL's for Windows NT. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Use of shared libraries, if supported by the operating system, results in less disk space required to store the application.	Determine if shared libraries are used by application software. Following installation of the application, the application binary files will be examined using the "file" utility to determine if dynamic linking of libraries is employed. For UNIX: To verify which application binaries use shared libraries execute the command:	Not Applicable	3 - 4

UNCLASSIFIED

	<p>file <binary name></p> <p>If libraries are dynamically linked execute the command:</p> <p>(SOLARIS) ldd <binary name> (TRU64 (Compaq)): odump -Dl "filename" or find . \(-type f \) -exec odump -Dl {} \; /tmp/"resultsfile" to determine which libraries are linked to the application.</p> <p>For NT: Information can be derived from HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\SharedDLLs Registry Entry.</p> <p>After installation of the application, the application directories will be examined for executable files. Identify the application executables by running the following command: dir /s /t:w /a</p> <p>In order to verify the application utilizes shared DLLs, the engineers will run a 'Dependency Walker' program such as 'Depend.exe' in conjunction with every executable file found. (depend.exe can be found on the Windows NT 4.0 Server Resource Kit).</p>		
--	--	--	--

UNCLASSIFIED

	Note that if an executable does not reference a DLL, it does not mean the application failed the requirement. It is necessary to consider what the function of the application is and if it is possible to utilize a DLL. Applications that have installable options typically store the code for the option in a DLL.		
--	--	--	--

OPS-21 The application shall not require use of a browser with acceptance of cookies enabled. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Many browser-based applications rely on cookies written by the web server and stored locally by the browser. This practice has been widely accepted and, at the current time, no security vulnerabilities relating to the use of cookies have been identified. However, site security policy may require acceptance of cookies to be disabled and the application must be able to function properly with this restriction.	<p>The browser will be configured to refuse cookies.</p> <p>Netscape: On the browser menu bar: Select <i>Edit</i> Using the pull down menu select <i>Preferences</i> Click <i>Advanced</i> to display the Cookie Options box Select the <i>Disable Cookies</i> option Click on the <i>OK</i> button.</p> <p>Internet Explorer: On the browser menu bar: Select <i>Tools</i> Using the pull down menu select <i>Internet Options</i> Click the <i>Security</i> tab</p>	Applicable	2 - 4

UNCLASSIFIED

	<p>Select the <i>Custom Levels</i> button</p> <p>Scroll to the <i>Cookies</i> section of the list and click on the</p> <p><i>Disable</i> option.</p> <p>Click on the <i>OK</i> button.</p> <p>NOTE: Cookies are stored in Netscape cache files on the UNIX version of Netscape; the PC version maintains a separate cookie file.</p> <p>The application will then be accessed. The behavior of the application will be evaluated to verify that it is functioning normally.</p>		
--	--	--	--

OPS-22 Web pages shall not contain animations and animated GIF files that do not implement mission functions. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
System resources that are required to display animation may cause additional delays in downloading the objects that implement animation or may cause performance problems for the application or for other applications. Animations must be limited to those which are clearly necessary to accomplish one or more mission functions.	The execution of the application will be inspected to verify that animations and animated GIF files have functions pertinent to the scope of the application.	Applicable	2 - 4

UNCLASSIFIED

OPS-23 Web pages shall not contain elements that obscure or interfere with reading clarity. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
This requirement emphasizes that application web pages should focus on mission functions rather than artistic additions that may distract from the application mission.	<p>The execution of the application will be inspected to verify that application web pages do not contain over busy background patterns, low contrast between foreground and background, non-functional blinking text, or other elements that would impact reading clarity.</p> <p>Blinking text may be used to implement or enhance mission functions (e.g., a flashing security alert).</p>	Applicable	2-4

OPS-24 Large graphic images shall be downloaded on demand. A small icon of the image shall be displayed on the web page and linked directly to the full-sized image. (UNIX & NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Large graphic images may cause performance problems on resource-limited workstations or on bandwidth-limited network links. Providing links to such images allows the user to select which larger images he or she wishes to see. The image size of 50 Kbytes should be used as guidance for determining which images should not be downloaded automatically.	The execution of the application will be inspected to verify that large graphic images are not automatically downloaded to application web clients. Images larger than 50 Kbytes should not automatically downloaded.	Applicable	2 - 4

UNCLASSIFIED

OPS-25 Not applicable for Version 3.0 test procedures.

OPS-26 The application software and documentation shall explicitly identify the software version and release of the application.
(UNIX and NT) NOTE: Converted from INST-8.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
A user site must be able to exactly identify what it is installing and configuring in order to ensure that the software is current. This information ensures that the documentation and software are for the same version and release. This information is also necessary when reporting errors or problems to a software support facility or help desk.	This objective will be evaluated by inspection of the software and documentation for version and release numbers. The information from both sources must match. Software items to examine include Splash Screens, About dialog box, and Help.	Applicable	3 - 4

3.5 USER INTERFACE

GUI-1 The application shall allocate read-only color cells from the default color map. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Using color cells in the default color map, maintained by the X server, is suitable for most applications on Unix systems. Each application requests allocation of color cells in order to use the colors for its display. Color cells in the default color map can be allocated as read-only cells or read-write cells. Read-only cells do not permit changing of the color value once the cell has been initialized. Therefore, read-only cells can be shared by more than one application. Read-write cells permit changing the color value that is stored in the cell (i.e., the color can be changed.). The X11 architecture does not allow sharing of read-write color cells. When an application requests a color and specifies read-only, the X server returns either the identifier of a previously allocated read-only color cell that contains that color value or the identifier of a newly allocated read-only cell that has been initialized with that color value.</p> <p>In order to improve coexistence of applications, applications should use read-only color cells as a general rule. Doing so permits sharing of color cells</p>	<p>The default color map can be determined by executing the “xdpyinfo” command from a shell window. The color map used by an application can be determined by executing the “xwininfo” command for each window (or just the main window as appropriate) of the application. The ID number of the color map output from the "xwininfo" command should match the default color map ID number output from the "xdpyinfo" command.</p> <p>The allocation of color cells can be observed using the “xcolor” utility. The command</p> <p style="text-align: center;"><code>xcolor -dump >save_file_name</code></p> <p>will write the contents of the default color map to the save file.</p> <p>If all of the application’s color cells are read-only, then the contents of the color map should not change after the application has been started the first time. The contents of the color map will</p>	Not Applicable	2 - 4

UNCLASSIFIED

<p>among applications and prevents (or delays) exhaustion of the color map.</p> <p>On Solaris platforms that have 24 bit frame buffers, the need to use the default colormap is reduced if the depth of the frame buffer visual is 24 bit. The X server can allocate more than one colormap, and the window focus can switch between windows (and colormaps) without any accompanying color flashing. However, applications that were originally implemented on systems with 8 bit frame buffers may not run or display properly. At this time, systems with 8 bit frame buffers are still used in the DoDIIS community, but the current generation of Solaris workstations typically include 24 bit frame buffers. Developers should ensure that applications will run properly on systems with either 8 bit or 24 bit frame buffers.</p> <p>Information on 24 bit frame buffers is found in the <i>Solaris Handbook for Sun Frame Buffers</i>.</p>	<p>change only if read-write cells are requested by the application. This is verified by running "xcolor -dump >new_save_file" after each subsequent start of the application and then comparing the contents of the saved color maps using the "diff" command.</p> <p>This requirement is Not Applicable for applications that require UNIX systems running 24 bit or higher (TrueColor) graphics. However, the tester must verify that the application documentation explicitly states the requirement for 24 bit frame buffers.</p> <p>This requirement is Not Applicable for the NT.</p>		
--	---	--	--

GUI-2 Applications requiring additional non-shared, read/write color cells, should allocate a private color map to avoid filling the default color map. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
An application that requires a large number of read-write color cells may elect to use a private color map. This is an acceptable approach for such an application	The design documentation should identify the need and implementation of the private color map. "xdpyinfo" and "xwininfo" can be used to	Not Applicable	2 - 4

UNCLASSIFIED

<p>because it reduces the probability of other applications failing to execute because they cannot obtain their colors.</p> <p>On systems with 8 bit frame buffers, the use of private color maps will cause color flashing on the display whenever the X server switches focus between a window associated with the default color map and a window that uses a different (i.e., private) color map.</p> <p>On systems with 24 bit frame buffers, no color flashing will occur.</p> <p>Unlike X11, the Windows NT architecture does allow the sharing of colors from its color map. Although color flashing does occur in NT, its effects are minimized due to the way Windows handles bitmaps and the dynamic reallocation of the color palette when an application is brought into focus.</p>	<p>obtain the identifiers of the default and private color maps. In actual usage, color flashing will be observed on systems with 8 bit frame buffers when focus changes from a window using the default color to a window owned by the application under test that uses a private color map.</p> <p>This requirement is Not Applicable for the NT platform.</p> <p>This requirement is Not Applicable if no private color maps are used.</p>		
---	---	--	--

GUI-3 The application shall display appropriate error messages when requested colors are not available. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The X server returns an error to an application when a request for a color cannot be serviced because no read-only or free color cells are available. The application can either terminate or display the built-in black and white colors. If the application terminates,	The default color map will be filled with a sufficient number of read-write color cells so that the application is unable to obtain all of its requested colors. This can be done using either a test driver that allocates read-write cells or by	Not Applicable	2 - 4

UNCLASSIFIED

then the correct reason for termination (i.e., colors could not be obtained) must be displayed. The error message can be displayed in the console window or in a popup window if possible. Applications should also write an appropriate message to the application audit trail.	<p>starting several invocations of an application that is known to use read-write cells. Once the color map is filled, the application is started. The display of a suitable error message that describes the reason (i.e., cannot allocate colors) for termination will be observed. If the application sends audits via the infrastructure audit Application Program Interface (API), the audit file will be examined for accompanying audit messages reporting the termination of the application and the reason for termination.</p> <p>This requirement is Not Applicable for the NT.</p>		
--	--	--	--

GUI-4 Application windows shall provide panning or scrolling methods to view panes larger than the available frame. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The application design should take into consideration the amount and dimensions of the information that will be displayed in application windows. Scrolling or panning methods should be provided for windows in which information output may either be too large to display completely or may scroll past before the user can read the window contents.</p> <p>Allowing the user to resize the window to display the full contents is an unsatisfactory solution, since there may be times when the largest window size is</p>	The application will be exercised to examine application windows in which information output is displayed. The presence or absence of scrolling or panning methods will be observed and the suitability or need for scrolling or panning methods will be evaluated.	Applicable	2 - 4

UNCLASSIFIED

insufficient to display all of the output. Also, scroll bars are an indication that there is more output; it is possible that a user may not recognize that a window should be resized to view the complete output. Conversely, the application design should not place scroll bars on windows when the scroll bars would serve no purpose.			
---	--	--	--

GUI-5 The application shall support copy and paste between windows. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Meeting this objective provides a user the ability to reduce errors resulting from incorrect data entries. In addition, the ability to copy and paste between windows will expedite data transfer between windows.	<p>The application will be examined to determine if user is able to copy and paste between windows.</p> <p>UNIX: Highlight to copy, middle mouse button to paste or use the copy/paste keys relevant to the platform.</p> <p>NT: Highlight, copy from dropdown menu, paste from dropdown menu or Highlight, CTRL+C to copy, CTRL+V to paste</p>	Applicable	2 - 4

GUI-6 The application shall permit resizing of application windows. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Window resizing can be useful to allow the user to customize the appearance of the desktop or to enlarge	The application will be exercised to examine the windows displayed by the application. The	Applicable	2 - 4

UNCLASSIFIED

customize the appearance of the desktop or to enlarge a window to display more information. The application design should permit resizing for windows for which resizing may be useful. Conversely, some windows (e.g., pop-up status windows and copyright windows) do not require the capability to resize.	windows displayed by the application. The capability to resize each window will be observed and the suitability or need for resizing will be evaluated.		
---	---	--	--

GUI-7 A hyperlink shall not navigate to itself. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
When a link is selected, the action is to load a new page that is either in the same application or in a different application. A link does not navigate to itself (i.e., to the top of the page in which the link appears). The link should not navigate to the same visible portion of a document (i.e., the link is visible on the user's screen); the link can navigate to a different portion of the same document, thus saving the user time to scroll down to that point. Each link on a page navigates to a different destination; the same link is not repeated with different names.	Links on the application home pages and on various sub-pages will be selected to verify that the current page is not the destination of the link. The requirement is met if selecting any link does not result in the same viewable portion of a document being visible in the resulting displayed page.	Applicable	3 - 4

GUI-8 Not applicable for Version 3.0 test procedures.

UNCLASSIFIED

3.6 INTEGRATION SECURITY

INTSEC-1 The directories touched during the application installation shall not contain files or directories that are world-writeable as a result of installation of the application. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The intent of this requirement is to ensure that the installation of an application does not result in the presence of files or directories in the application directory tree that are world-writeable. This can happen inadvertently due to an incorrectly set umask or because of an incorrectly designed installation procedure.</p> <p>It is also possible that some files or directories in the application's directory tree should be world-writeable. This is acceptable provided such files or directories do not introduce security vulnerabilities. These files and directories should be identified in the application installation and security documentation.</p> <p>On NT, by default every user belongs to a group called "everyone". The "everyone" group (by default) has "full" access to all files on the system.</p>	<p>The following command can be used to scan the application directory tree for world-writeable files:</p> <p>UNIX: find root_dir -perm -0002</p> <p>where root_dir is the root of the application directory tree. The -perm option of -0002 will match all files and directories that are world-writeable. This command can be piped to the input of another command as necessary.</p> <p>On NT: The test engineer will perform the following BEFORE the application is installed (make sure all applications/windows are closed): Start → Run. In the open field enter: Cmd ← In the command prompt enter: > del \temp\pre_cacsl.txt ← (if it exists) >(FOR /R drive: %f IN (*) DO CACLS "%f"</p>	Applicable	1 - 3

UNCLASSIFIED

	<p>/c) >> \temp\pre_cacls.txt ← where <i>drive</i> is each logical disk drive on the system</p> <p>Then, AFTER the application has been installed (make sure all applications/windows are closed) execute the following:</p> <p>Start → Run. In the open field enter: Cmd ←</p> <p>In the command prompt enter:</p> <p>> del \temp\post_cacls.txt ← (if it exists) >(FOR /R <i>drive</i>: %f IN (*) DO CACLS “%f”</p> <p>/c) >> \temp\post_cacls.txt ←</p> <p>where <i>drive</i> is each logical disk drive on the system</p> <p>By comparing the files(\temp\pre_cacls.txt with \temp\post_cacls.txt), the test engineer will verify that the application does not allow the ‘everyone’ group Full or Change access to files added or touched by the application installation.</p> <p>This requirement cannot be met if there are world-writeable files or directories in the application directory tree that have consequences for either the security of the application or the security of the platform.</p>		
--	---	--	--

UNCLASSIFIED

INTSEC-2 The application shall not require software development tools on functional user workstations. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The presence or absence of software development tools on workstations or servers is a site security policy item.</p> <p>Development tools include tools that compile source code into executable objects, tools that interpret and execute source code files, and tools that are used to trace and debug an executing object. The intent of this requirement is to prevent users from modifying the intended behavior of an application and from introducing new executable objects onto a workstation.</p> <p>Compilers and compiler support software (e.g., the C and C++ compilers) are not permitted on general user workstations. The execution of compiled software objects does not require the presence of these tools. Compilers for mobile code such as Java are included in this group. Likewise, software debuggers are not needed to execute the application. A debugger might be used to modify the behavior of the application and should not be available on user workstations. Interpreter software, such as perl or TCL/TK, are necessary in order to launch and run software written in those languages. Any mission application software that includes interpreted software must be adequately</p>	<p>The application configuration and installation guide will be examined to verify that software development tools are not required to use the application. The application will be installed on workstations that are loaded with the common infrastructure that does not include software development tools. Following installation of the application, the directories that have been touched by the application installation will be examined to verify that no software development tools have been added to the workstation (e.g., C compilers). Tools that are not permitted on user systems include:</p> <ul style="list-style-type: none">- cc and other C compilers- c++ and other C++ compilers- dbx, adb, sdb, and other debuggers- Javac and other JAVA compilers <p>Directories will be examined by executing the command:</p> <p>UNIX: ls -latR</p> <p>NT: dir /s</p> <p>The presence of interpreters for perl, TCL/TK, or other scripting languages is acceptable. However, any mission application script that is interpreted and executed should be examined to</p>	Applicable	1 - 2

UNCLASSIFIED

protected from alteration. Development tools may be required on certain systems, such as development systems. The site security concept of operations must address this issue. However, functional users must not need them in order to use the application.	ensure that its permissions do not permit unauthorized modification.		
--	--	--	--

INTSEC-3 The application shall not implement or require storage of passwords in clear text. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In order to simplify or speed up user access to application server applications, the application may implement storage of passwords for transmission to server applications. However, for obvious security reasons, these passwords must not be stored in clear text. This is particularly critical if general users can read the stored information without acquiring any additional privileges.	During installation and configuration of the application, the test engineer will verify that the application stores passwords for general users and identify the storage locations. The test engineer will examine the storage locations and view the passwords. The requirement is not met if the passwords are stored in clear text.	Applicable	1 - 2

INTSEC-4 The application shall not require the presence of an entry relating to the application server in the /.rhosts file. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Entries in the /.rhosts file should be made with care since several security vulnerabilities can be traced to incorrect usage of this file. Depending upon the site security architecture and the application design, an	The /.rhosts file on the test workstation(s) will be examined for entries corresponding to the application server. If such entries are found, they will be removed to determine if application	Applicable	1 - 3

UNCLASSIFIED

entry in the /.rhosts file may be appropriate. However, using the /.rhosts file is discouraged in most cases; therefore the entries should be kept to a minimum. Using the /.rhosts file to permit transparent access by root from remote workstations should be avoided unless absolutely necessary. Instead, the access should be mapped to another user ID.	requires the deleted entries to function correctly. This requirement is Not Applicable for the NT, since there is no equivalent /.rhosts file.		
--	---	--	--

INTSEC-5 The application shall use system access control facilities for discretionary access. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In general, applications must rely on the security services provided by the common infrastructure instead of duplicating them. An application will only implement security functions that are unique to itself and that cannot be met by the infrastructure security services. The protection mechanisms of the platform operating system are considered adequate and acceptable for discretionary access control (DAC). It is not necessary for an application to provide additional access control functions unless there are specific reasons to do so. Application program managers must confirm such requirements and obtain approval from the DoDIIS Engineering Review Board (ERB) and the application security certifier before implementing additional DAC.	The appropriate application documentation, e.g., System Security Requirements, System Security Analysis, will be examined to determine the implementation of discretionary access by the application. Based upon the application design and implementation, ad hoc test cases will be run by the test team to exercise and demonstrate the discretionary access functions of the application.	Not Applicable	2 - 4

UNCLASSIFIED

INTSEC-6 The application shall not require users to login using privileged user accounts. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
General users must not need to login as root or as a privileged user (e.g., an administrative user on NT) to perform general user functions. While specific application functions may require execution with additional privileges, the privilege can be granted on demand by the application in a way that is transparent to the user. Additional privileges may be required to manage the application. Users who perform management of the system's resources or who are responsible for the security of the system are the only individuals who should have access to root privileges or to other system privileges.	The appropriate application documentation (e.g., SDD, Software User's Manual (SUM)) will be examined to verify that login as root or as a privileged user is not required to use the application. The test engineer will login to the application as a general user, following the configuration and installation of the application. The test engineer will perform ad hoc tests to verify the basic function of the application.	Applicable	1 - 2

INTSEC-7 The application shall not require functional user access to a shell or command prompt. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Although restriction of shell or command prompt access is no longer considered a security requirement, uncontrolled use of the shell/command prompt should be discouraged. This not only prevents users from taking advantage of vulnerabilities of the operating system or workstation configuration, but also reduces the possibility of users damaging either data or	The appropriate application documentation (e.g., SUM) will be examined to identify how a user invokes and executes the application. The documentation will verify that shell access or command prompt is not required to use the application. Following configuration and installation of the application, invoke the	Applicable	2 - 3

UNCLASSIFIED

environment by incorrect usage of Unix/NT operating system capabilities. Instead, user interaction with the application should be through graphical user interfaces.	application. Execute ad hoc test cases to verify that the application will execute properly without the use of a shell or command prompt.		
--	---	--	--

INTSEC-8 Application programs shall not be assigned setuid or setgid permissions to another user ID or group ID. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The “setuid” programs are a source of potential security vulnerabilities in site workstations and servers, particularly if the application provides to the user the capability (intended or unintended) to obtain a shell window. For most purposes, restricting application access by Unix group membership is a suitable and acceptable approach. The need to configure the application as a setuid program should be stated clearly in the application design documentation.</p> <p>Likewise, setgid (set groupid) programs also may provide security vulnerabilities, although to a lesser extent than setuid programs.</p> <p>NOTE: the “Log On As” feature of NT is equivalent to suid/sgid in UNIX.</p>	<p>Following the configuration and installation of the application, the permissions that are set on the application executable files will be reviewed to verify that the setuid bits and/or the setgid bits are not set. For each file that has the setuid bit or the setgid bit set, the exact permissions will be noted. Setuid files that are not writeable by others do not meet this requirement, but will be assigned a lesser impact level than setuid files that are writeable by others. The same is true of setgid files that are not writeable by group members.</p> <p>UNIX: Locate suid and sgid files by issuing the following commands: <code># cd <APPLICATION_ROOT></code> <code>#find . -perm -4000 -ls</code> ;returns set UID files <code>#find . -perm -2000 -ls</code> ;returns set GID files</p>	Applicable	1 - 2

UNCLASSIFIED

	<p>NT:</p> <ol style="list-style-type: none"> 1) Start→Settings→Control Panel→Services 2) Double-Click on all services provided and/or required by the application 3) Verify that the 'This Account' button in the 'Log On As' section of the Service window is not active. <p>The requirement is met if:</p> <ul style="list-style-type: none"> -neither UNIX command reports any files -the 'This Account' button is not active in NT. 		
--	---	--	--

INTSEC-9 The application shall not be used to modify operating system and other shared files. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In general, execution of the application should not create security vulnerabilities for other applications or for the operating system of the user's workstation or of the platform on which the application server resides. Vulnerabilities could occur due to changes in permissions of application files, changes in ownership of application files or other files, or modification of the contents of application files and files shared with other applications. This objective applies to all phases of application usage, i.e., startup and initialization, information processing, logging/auditing, and application termination. This	<p>The application documentation will be reviewed to determine the application files and other shared files that are referenced by the application during normal use.</p> <p>The requirement is not met if a file written by the application contains system-wide resource that would create security vulnerabilities for other applications or for the operating system of the user's workstation.</p>	Applicable	1 - 2

UNCLASSIFIED

also includes the capability of obtaining a command line prompt (e.g., a UNIX shell) from within the application. While access to the command line may not be prohibited, it is a service of the infrastructure, not of the application, and such a capability might allow a user to modify resources without authorization.			
--	--	--	--

INTSEC-10 The application shall not implement audit collection or audit delivery functions. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The common infrastructure provides an audit API for applications. Applications that use this API do not have any need to implement additional audit functionality.	The appropriate application documentation (e.g., System Security Requirements, System Security Analysis) will be examined to determine the use of the infrastructure audit API for generating audit records. The application will be inspected to verify that audit collection or audit delivery functions are not implemented by the application.	Applicable	2 - 3

INTSEC-11 The application shall use the infrastructure audit API for generating audit records. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
The common infrastructure provides a set of security functions. This set includes a single audit API for use by applications to write and transmit audit records. Therefore, there is no need for an application to either use a different audit mechanism or to implement its	The appropriate application documentation (e.g., System Security Requirements, System Security Analysis) will be examined to determine that audit API is being used for generating audit records by the application.	Not Applicable	2 - 3

UNCLASSIFIED

<p>own unique audit mechanism.</p>	<p>For UNIX: To verify the use of the audit API for generating audit records by the application execute the following command in a shell window:</p> <pre>tail -f /var/log/syslog</pre> <p>Note: The lines are displayed in the window as applications and application utilities write them to the syslog file. Using selected test cases from the application security test procedures, verify that application audits are written to /var/log/syslog and are displayed to the shell window at the same time.</p> <p>The audit API generates audit records in the following format: <i>DTG:Process Name [PID]:Program:Program Event ID:Message Level:User Name [UID]:Event Specific Information\n</i></p> <p>The DTG field consists of the month, day, and time the audit record was generated. The Process Name [PID] field is the ASCII name of the process that generates the message; the Process Identifier (PID) is placed within square brackets. The process name includes the name of the workstation or server on which the process is running.</p> <p>The Program field is the ASCII name of the project that generated the audit event</p>		
------------------------------------	--	--	--

UNCLASSIFIED

	<p>The Program Event ID field is the numeric ID associated with the audit event.</p> <p>The Message Level field is an ASCII keyword that indicates the urgency level of the audit record.</p> <p>The User Name [UID] field contains the ASCII name and numeric user ID of the general user that owns the process generating the message.</p> <p>The Event Specific Information field is determined by the security requirements of the application and must be terminated with a new line character, '\n'.</p> <p>For NT: The Event Log is used to store audit information from an application. From the Start menu select: Programs->Administrative Tools->Event Viewer Once the window is displayed select: Application from the Log menu</p> <p>All application logs are displayed.</p> <p>This requirement is Not Met if the application writes no audits.</p>		
--	---	--	--

UNCLASSIFIED

INTSEC-12 The application audit strategy shall be integrated into site audit architecture. (UNIX only)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>The use of the infrastructure audit interface is required. Compliance with this requirement is an important step toward integrating the application auditing into the site audit architecture. This is because all applications that comply with this requirement will be using the same audit (API) and the same audit formats. This uniformity will improve the ability of a site to implement a single approach to audit collection and analysis.</p> <p>A site's audit strategy will also include collection and analysis of operating system audit data. An application may either rely on the operating system auditing or actually generate audits that use the operating system audit API. The approach should be clearly documented in the application design documentation, and the audit collection mechanism, API, and audit formats should be clearly described.</p>	<p>The primary consideration in evaluating if an application meets this objective is the level of effort required to integrate the application's audit into a site's audit architecture. A strategy that does not use either the infrastructure audit API or the operating system audit API does not meet this objective. Reliance on the operating system API can pose difficulties since the audit API and audit format will differ across the operating systems. Since the operating system audits must also be integrated into the site audit architecture, this approach is acceptable. However, it poses a level of effort that is higher than the use of the infrastructure audit API.</p> <p>For NT, auditing is done automatically by the Operating System. Therefore, this requirement is Not Applicable.</p>	Not Applicable	2 - 3

INTSEC-13 The application web server shall audit user activity in accordance with DoDIIS security policy. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Application web servers must provide audit records	Application documentation will be reviewed to	Applicable	2 - 3

UNCLASSIFIED

of user activity. This is important since the user's workstation will not provide information on activity that occurs during browser sessions. Audit records should include, at a minimum, the requesting host, date and time, username, web page and/or data accessed, and type of operation (read, write, etc.).	identify the auditing strategy of the application web server. The application will be exercised from a client workstation. The audit trail of the application server will be monitored to verify that the application server is auditing user activity.		
--	--	--	--

INTSEC-14 The application web server shall not store sensitive information in cookies. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Although security policy does not prevent the use of cookies, an application should not write sensitive information to the cookie file. Sensitive information is any information, such as the user's password, that may affect the security posture of the application or of other site systems.	The application will be exercised from a client workstation. The browser in use on the workstation will be configured to accept cookies. During the user's session with the application server, the browser cookie file will be monitored and the contents of each cookie written by the browser will be examined for potential vulnerabilities.	Applicable	1 - 2

INTSEC-15 If the application web server implements identification and authentication, then browser access to pages on the server by explicit URL addressing shall be denied unless the user has already been authenticated. (UNIX and NT)

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Application web servers may implement login as part of the application identification and authentication policy. In order to use the application, the user	The application will be exercised from a client workstation. The test engineer will collect absolute paths to documents or directories that	Applicable	1 - 3

UNCLASSIFIED

<p>accesses the server via a browser. The initial web page requires the user to enter an identifier and password before he or she is allowed to use the application.</p> <p>For such an implementation, the user must not be permitted to access pages on the server by entering an absolute path to a document or service in the browser destination field. Actions like this can be used to bypass the identification and authentication mechanism of the application and should either be denied or mapped to the application login window.</p>	<p>are available on the application server. Prior to logging in to the application, the test engineer will enter absolute paths in the destination field of the browser.</p> <p>The requirement is met if each attempt to use the absolute path is either denied or the test engineer is presented the application login page.</p>		
--	--	--	--

INTSEC-16 The web server shall log all connections and data requests that are received by the web server. (UNIX and NT) NOTE: This requirement was identified as INST-30 in Version 2.1.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Logging by the server assists in identifying operational problems as well as providing a record of access to the server. If logging is used as the primary auditing tool, then the log record should include the date and time, the host name, the files or services accessed, and, if possible, the username.</p>	<p>The application server configuration files will be examined to verify that logging by the http daemon is properly configured.</p> <p>The test engineer will access the server through the browser interface. The test engineer will perform several test transactions with the application server. The test engineer will then examine the httpd log file and verify that the access is recorded and that the correct date, time, and host names are recorded.</p>	<p>Applicable</p> <p>Evaluate on Server.</p>	<p>2</p>

UNCLASSIFIED

	UNIX - Apache # cd [web server base directory]/conf # grep ^CustomLog *conf ;note the log file. (e.g., interpreting the following result from the 'grep' command: httpd.conf:CustomLog /opt/apache/logs/access_log common the log file is '/opt/apache/logs/access_log') # view [log file] -verify that the required data is being logged into the log file.		
--	---	--	--

INTSEC-17 The web server configuration shall implement Discretionary Access Control (DAC). (UNIX and NT) NOTE: This requirement was identified as INST-31 in Version 2.1.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
<p>Web servers provide the capability to configure and enable DAC to server resources.</p> <p>For example, the files access.conf enables access control on an httpd web server. The .htaccess defines access control per directory and can modify the global directives contained in access.conf.</p>	<p>After the application server has been installed, the web server configuration will be examined to verify that DAC has been enabled.</p> <p>For Apache web servers, verify the presence of the “access.conf” file. The test engineer will access the server via a browser and evaluate the access control as defined in the access.conf file. The directories under the document root of the server document directory tree will be examined for the presence of .htaccess files. For directories that do not contain .htaccess files, the server will</p>	<p>Applicable</p> <p>Evaluate on Server.</p>	1 - 2

UNCLASSIFIED

	<p>be accessed via a browser, and the test engineer will browse through each directory. The test engineer will evaluate whether he or she is able to exploit any security relevant functions due to the absence of .htaccess files.</p> <p>The requirement is met if the DAC configuration is defined and if the test engineer is unable to view information or exploit functions for which a general user is not authorized..</p>		
--	--	--	--

INTSEC-18 The web server processes shall be owned and run by a user name that is not superuser (UNIX) or an administrative user (NT). (UNIX and NT) NOTE: This requirement was identified as INST-32 in Version 2.1.

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
Files, directories, and processes that are not directly related to operating system and platform management should not be owned by a superuser (root on Unix and an administrator user on NT) to limit security vulnerabilities and to avoid the need for superuser access to manage the application.	<p>The ownership of the httpd executable file shall be examined to verify that it is not owned by root (Unix) or an administrative user (NT).</p> <p>After the http daemon has started, the ownership of the httpd process shall be inspected to verify that it is not owned by root (Unix) or an administrative user (NT).</p> <p>(Apache - UNIX) There are 3 configuration files, (httpd.conf, srm.conf and access.conf), that can contain these server</p>	<p>Applicable</p> <p>Evaluate on Server.</p>	1 - 2

UNCLASSIFIED

	<p>settings. The following commands will return the appropriate settings that should be compared:</p> <pre># cd <HTTP server root directory>/conf/ # grep "^User " *.conf (note the single space between the 'r' and quote)</pre> <p>(SuiteSpot) Verify that the ownership of the the httpd, ns-httpd and uxwdog processes are not owned by root.</p>		
--	---	--	--

INTSEC- 19 General users shall not view or launch privileged application functions. (UNIX and NT) NOTE: This requirement is new in Version 3.0

REQUIREMENT CLARIFICATION	TEST METHOD	CENTRAL SERVER WITH BROWSER	IMPACT CODE RANGE
In keeping with the security principle of least privilege, a general user should only be presented with selections or functions that he/she is authorized to access. Privileged functions should not appear on a user's menu if they cannot be selected. This approach reduces the possibility of unauthorized users exploiting application functions that can affect the security of the application or infrastructure.	Tester will access the application as a general user. The menus and function selections will be evaluated to verify that a general user cannot view privileged functions.	Applicable	1 - 3

UNCLASSIFIED

4 ACRONYMS

ACRONYM	DEFINITION
ABI	Application Binary Interface
API	Application Program Interface
COTS	Commercial Off-The-Shelf
DAC	Discretionary Access Control
DBMS	Data Base Management System
DeXA	DoDIIS Executive Agent
DII COE	Defense Information Infrastructure Common Operating Environment
DMB	DoDIIS Management Board
DoDIIS	Department of Defense Intelligence Information System
ERB	Engineering Review Board
GIF	Graphics Interchange Format
GOTS	Government Off-The-Shelf
GUI	Graphical User Interface
html	Hyper Text Markup Language
http	Hyper Text Transfer Protocol
ID	Identifier
IP	Internet Protocol
IMA	Intelligence Mission Application
JITF	Joint Integration Test Facility
JTA	Joint Technical Architecture
NFS	Network File System
NIS	Network Information Service
PID	Process Identifier
PMO	Program Management Office

UNCLASSIFIED

ACRONYM	DEFINITION
RAM	Random Access Memory
RPC	Remote Procedure Call
SAT	Site Acceptance Test
SDD	Software Design Document
SUM	Software User's Manual
TCP	Transmission Control Protocol
TFUG	Trusted Facility User's Guide
URL	Uniform Resource Locator
VDD	Version Description Document
VTF	Virtual Test Folder
XPG	X/OPEN Portability Guide